

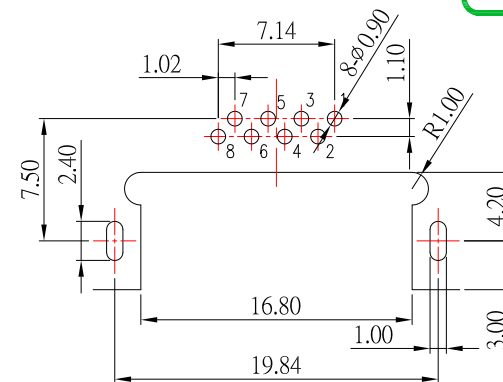
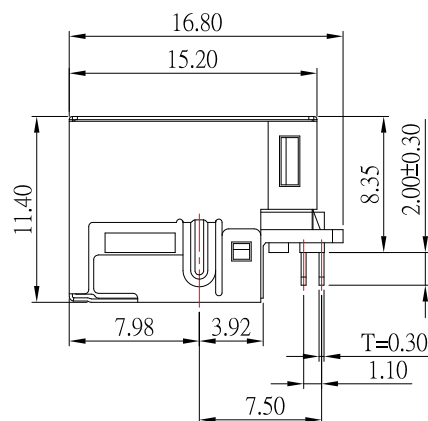
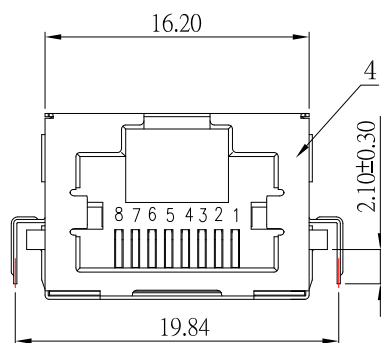


— 鍍層厚度：

Blank : 1u''
1 : 3u''
2 : 15u''
3 : 30u''
5 : 6u''

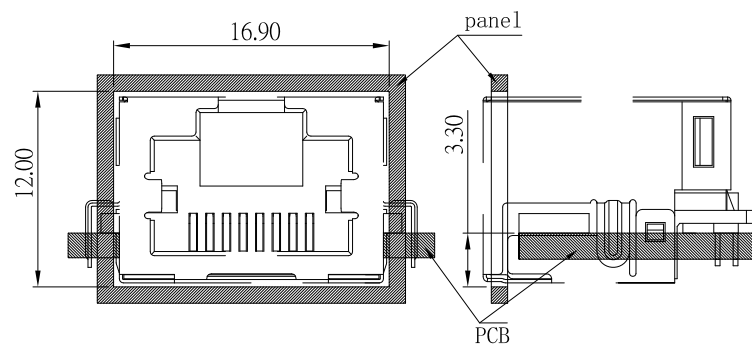

P.C.B LAYOUT
TOP VIEW



Recommended panel cutout.

1. STORAGE: -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION : -40°C TO $+85^{\circ}\text{C}$.

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	07/08/2012
CHECKED BY:	DATE
Jacky Chen	07/08/2012
APPROVED BY:	DATE
Tony Kao	07/08/2012

1	MAT'L		TITLE	RJ45	
	FINISH		MODLE	RJ45	
1	SCALE	1 : 1	DWG NO.	RJ45-41933-x-S118	SIZE A4
1	SHEET NO.	2 of 1	PART NO.	RJ45-41933-x-S118	VER R

7			
ITEM NO.	DESCRIPTION	DRAWN	DATE