

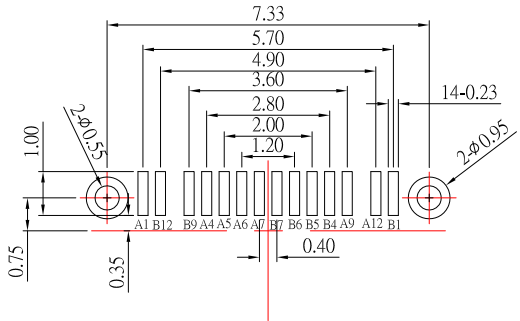
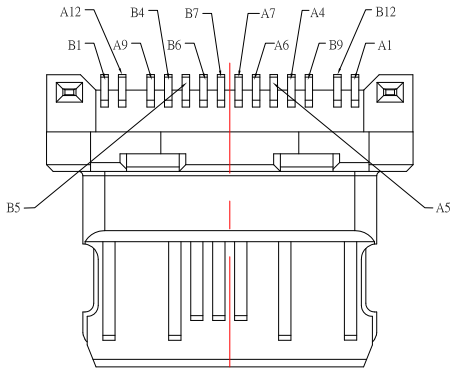


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

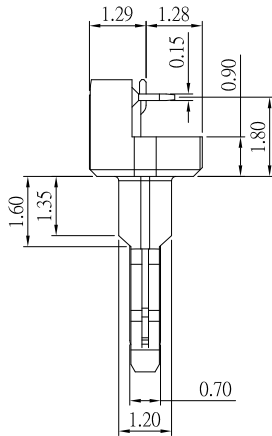

RECOMMENDED P.C.B. LAYOUT

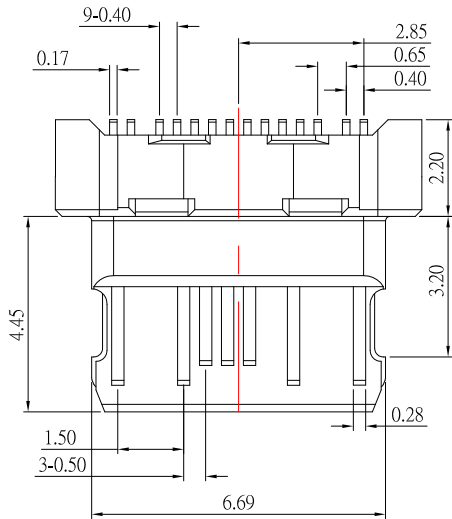

SPECIFICATIONS

Electrical:

- Rating: 30V DC , 3.0 A
- Dielectric Withstand Voltage: 500V AC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 1000 MΩ Min

Material:

- Housing: LCP
- Contact: C7025
- Mid Plate: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- Mid Plate: Tin under Plated surface layer



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE

08/05/22

CHECKED BY:
Jacky Chen

DATE

08/05/22

APPROVED BY:
Tony Kao

DATE

08/05/22

MAT'L

FINISH

SCALE

TITLE

MODLE

DWG NO.

CONNECTOR

SBC-140M2-202-S412

PART NO.

SIZE

A4

VER

R4

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	新增尺寸	Jack	080522
3	新增尺寸	Jack	052322
2	更新Contact材質	Jack	101821
1	更新材質	Jack	123120