


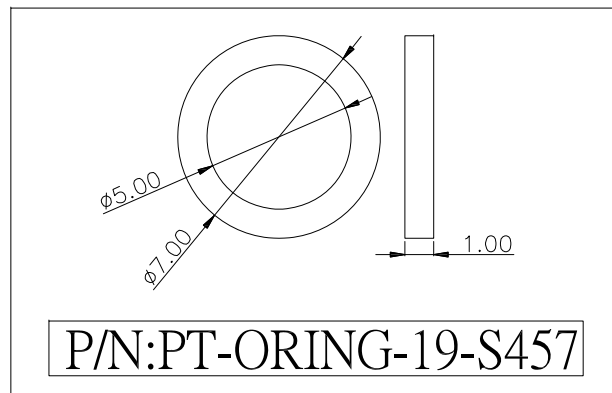
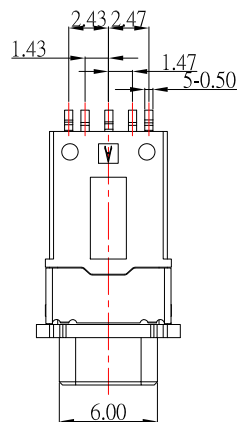
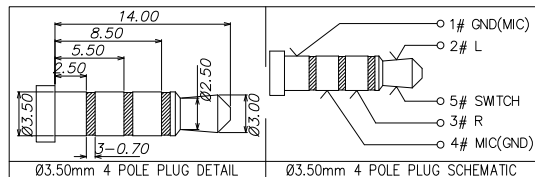
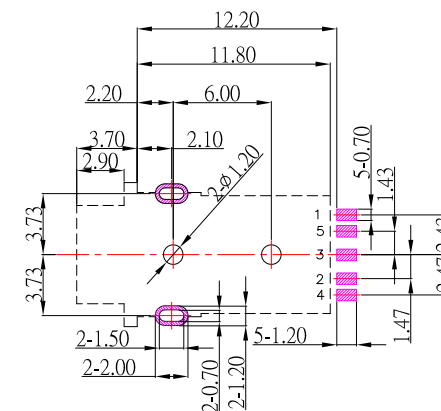


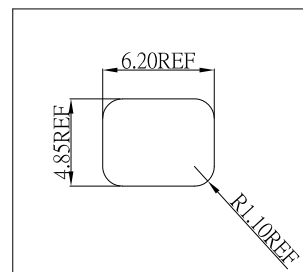



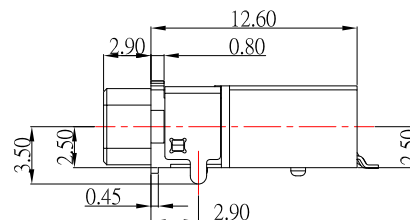

IPX7



RECOMMENDED P.C.B. LAYOUT
TOP VIEW

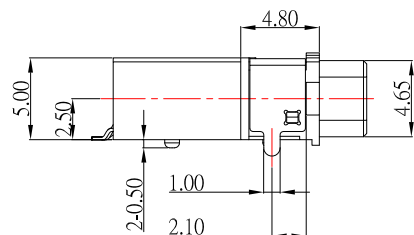

面板開孔參考尺寸

SPECIFICATION

- 1.Rating : 12V , 0.5A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500V AC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

⑧	COVER	1	PA10E BLACK
⑦	HOUSING	1	PA10E BLACK
⑥	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING
⑤	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE WHOLE
④	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE WHOLE
③	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE WHOLE
②	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE WHOLE
①	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH ON THE WHOLE
ITEM	NAME	Q'TY	DESCRIPTION

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/29/23
DATE: 06/29/23
DATE: 06/29/23

MAT'L		TITLE	JACK
FINISH		MODLE	3.5mm PHONE JACK 防水型
SCALE	1 : 1	DWG NO.	PJ-WP30015DS-S457
SHEET NO.	1 of 1	PART NO.	PJ-WP30015DS-S457

SIZE
A4
VER
R3