

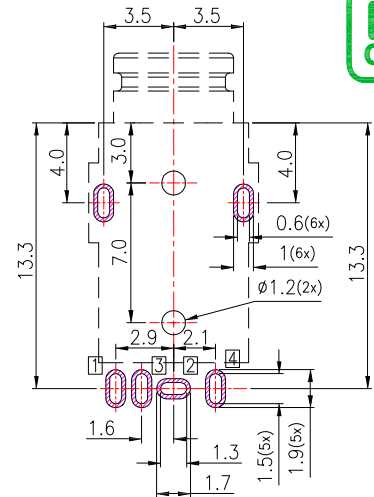
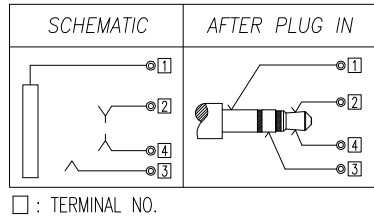
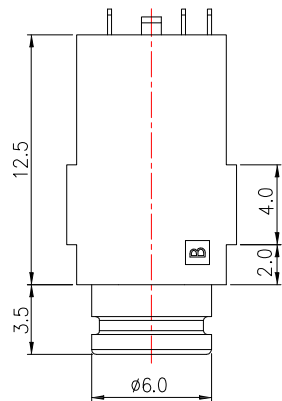




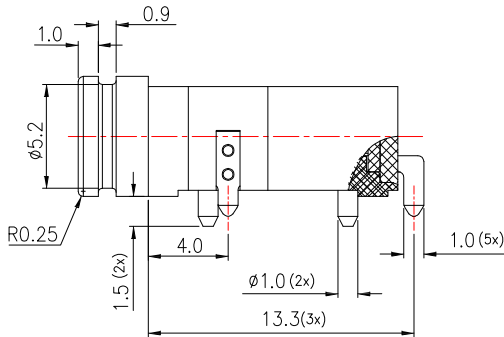


Recommended PCB Layout
(Top view)



SPECIFICATION

- Rating : 12V , 1.0A
- Contact resistance : $\leq 30\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles
- Waterproof Lever: IPx7

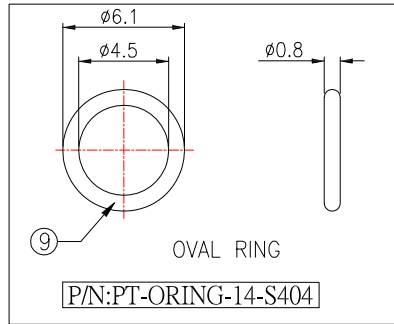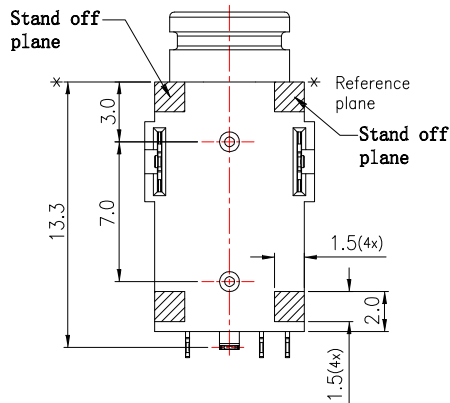

9	OVAl RING	----	1	SILICONE	GREEN
8	BOND	----	1	EPOXY	----
7	TERMINAl	----	2	C2680	Matte Sn ; Ni underplc
6	TIP SPRING-2	4	1	C5210	
5	RING SPRING	3	1	C5210	
4	TIP SPRING-1	2	1	C5210	
3	EARTH SPRING	1	1	C5210	
2	COVER	----	1	PA9T	
1	HOUSING	----	1	PA9T	
ITFM	PART NAMF	TERMINAl	QTY	MATFRIAl	RFMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	08/03/20			
CHECKED BY:	DATE	FINISH	MODLE	3.5mm PHONE JACK 防水型
Jacky Chen	08/03/20			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-WP35434C-S404
Tony Kao	08/03/20	1 : 1		
		SHEET NO.	PART NO.	PJ-WP35434C-S404
				SIZE A4
				VER R1

1	新增搭配O-RING料號	Jack	080320
ITEM NO.	DESCRIPTION	DRAWN	DATE