
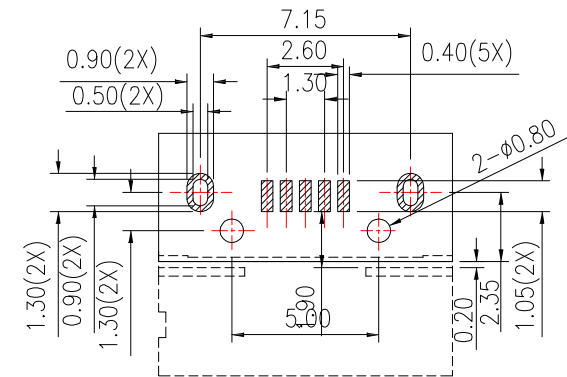
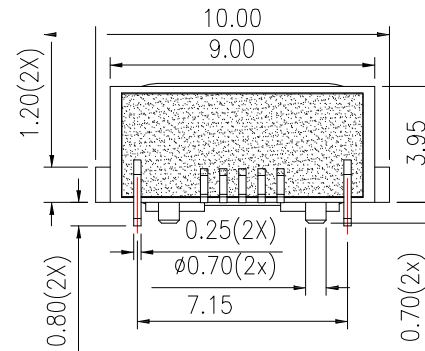
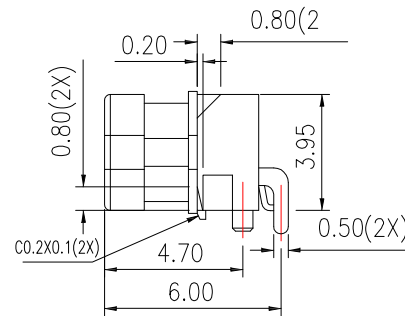
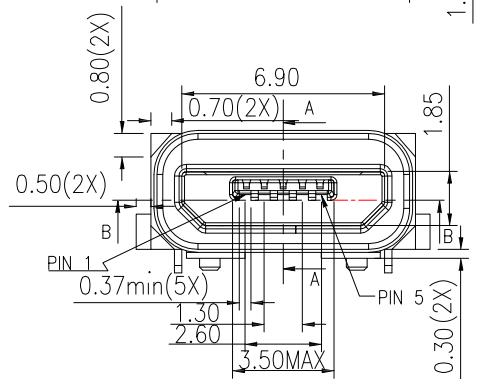




IPX7

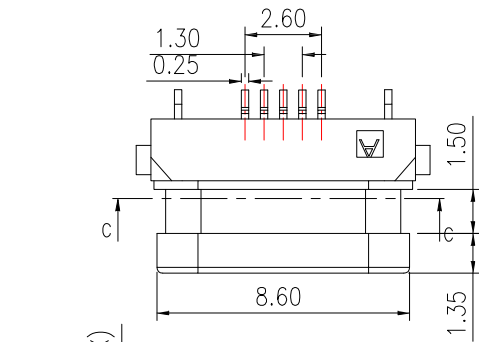

P.C.B LAYOUT MOUNTING PATTERN

MRUSB-5B-WP17-x-S404

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

NOTES:

MATERIAL:

1.1 HOUSING: PA9T

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER



3.SPECIFICATION:

3.1 RATING: 1.8A(PIN1&5) , 0.5A(PIN2&3&4)

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 300 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

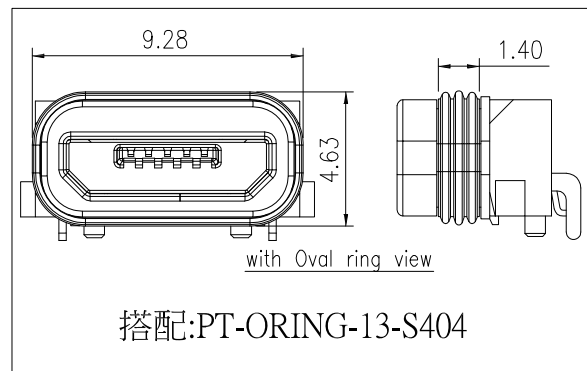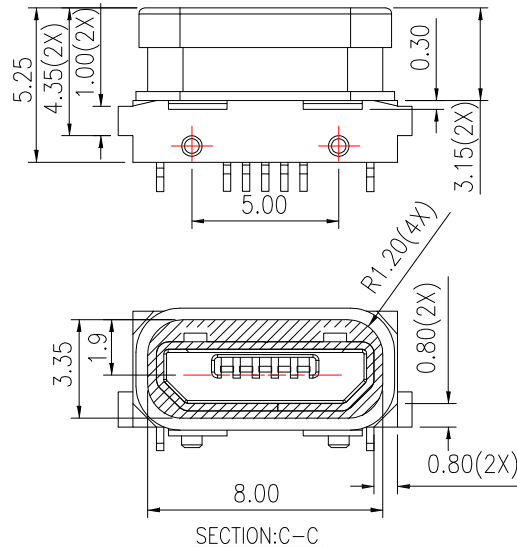

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

07/22/20

CHECKED BY:

Jacky Chen

DATE

07/22/20

APPROVED BY:

Tony Kao

DATE

07/22/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO USB 5PF B TYPE H 3.95

防水型 IPX7

MRUSB-5B-WP17-x-S404

MRUSB-5B-WP17-x-S404

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------