







IP67

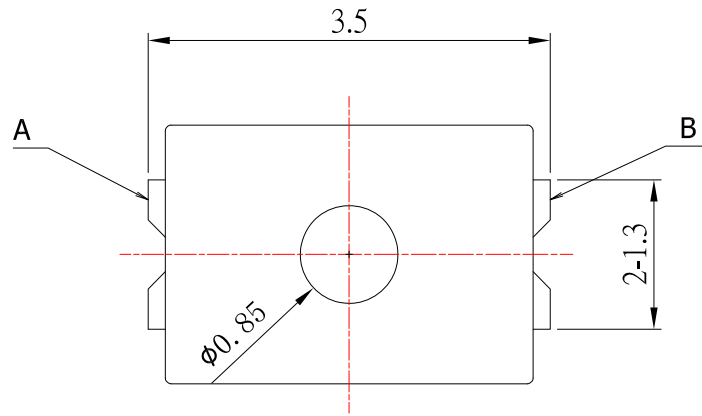

CIRCUIT DIAGRAM

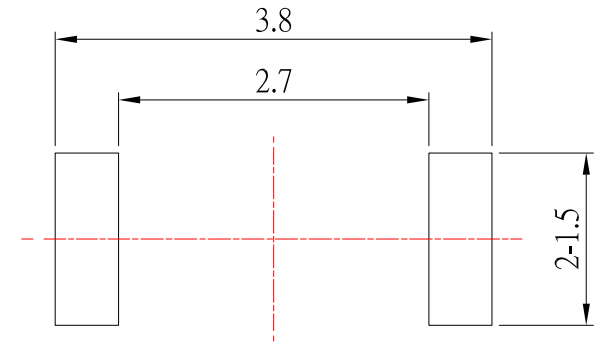

P.C.B LAYOUT MOUNTING PATTERN

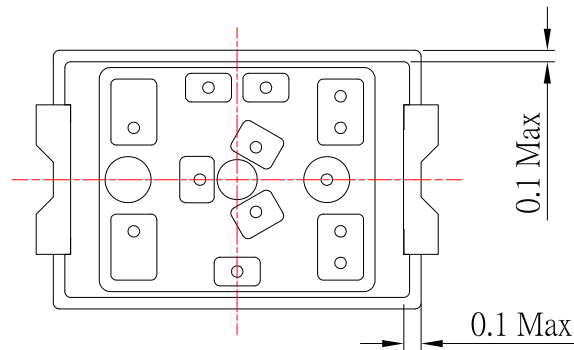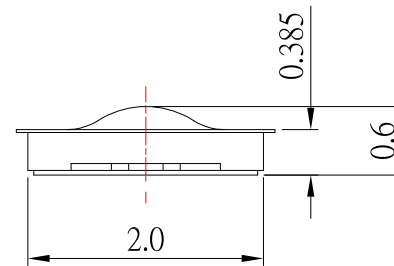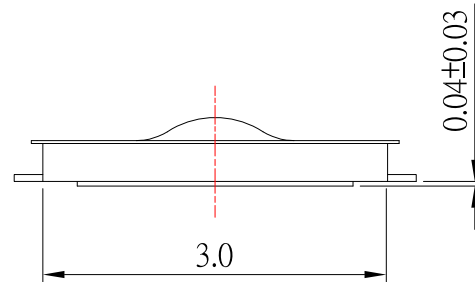

SPECIFICATIONS

Rating	DC 15V 20mA			
Contact Resistance	500mΩ Max.			
Travel	0.13 ± 0.1mm			
Operating Force	3	240 ± 70gf	4	330 ± 70gf
Operating Life (cycles)	500,000		300,000	

5	更新尺寸	Jack	061919	CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S UNITS MM
4	新增尺寸公差	Jack	061418	
3	IP67標示位置更新	Jack	091417	
2	更新尺寸	Jack	081816	
1	新增Water-proof level	Jack	081616	
ITEM NO.	DESCRIPTION	DRAWN	DATE	

DRAWN BY:	DATE	MATL	TITLE	SIZE
Jack Lu	06/19/18		SWITCH	
CHECKED BY:	DATE	FINISH	MODLE	
Jacky Chen	06/19/18		TACT SWITCH(内置按钮)for Waterproof	
APPROVED BY:	DATE	SCALE	DWG NO.	VER
Tony Kao	06/19/18	1 : 1	TS-A29A-x-S048	A4
		SHEET NO.	PART NO.	R5
		1 of 1	TS-A29A-x-S048	