
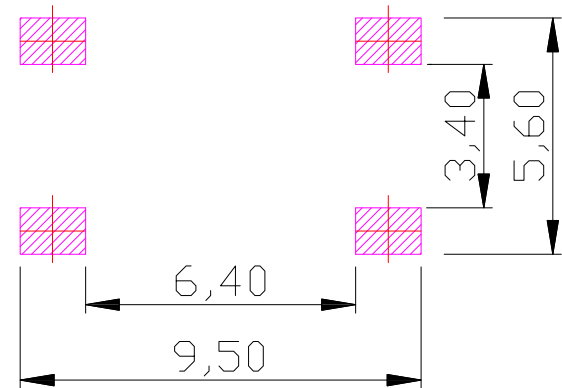
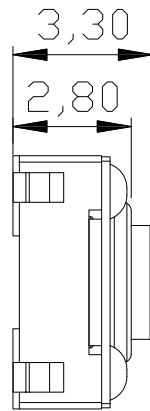




IP67

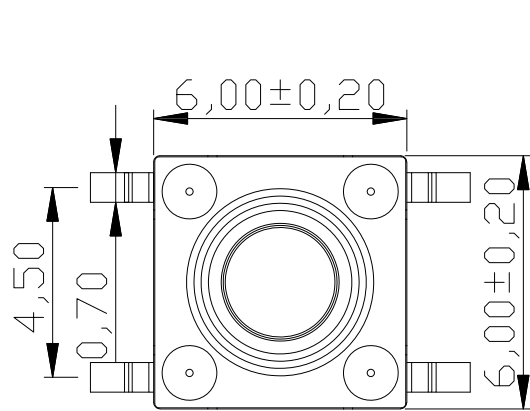

P.C.B MOUNTING PATTERN DIMENSION

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	50mΩ Max.		
Travel	0.30 ± 0.10 mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000		

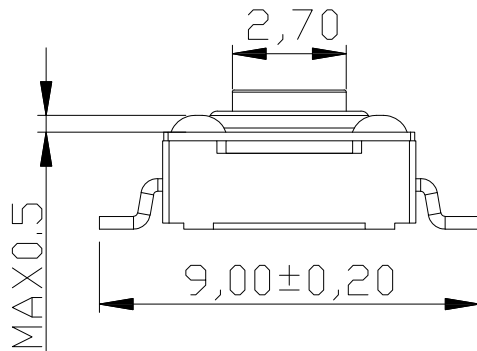

CIRCUIT DIAGRAM

F	TERMINAL	4	BRASS	Ag plated
E	BASE	1	PPA(BLACK)	
D	CONTACT	1	SUS	Ag plated
C	FILM	1	POLYAMIDE	
B	COVER	1	SUS	
A	STEM	1	PPA(BLACK)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3	3RD. ANGEL'S	UNITS	MM
-------------------------------------	---	--------------	-------	----

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	07/01/21			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH 6X6 SMT WATERPROOF TYPE
Jacky Chen	07/01/21			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A67W-x-S428
Tony Kao	07/01/21	1 : 1		
		SHEET NO.	PART NO.	TS-A67W-x-S428
		1 of 1		