





SUA-110V8I-x-S329

COLOR :

Black : B

White : W

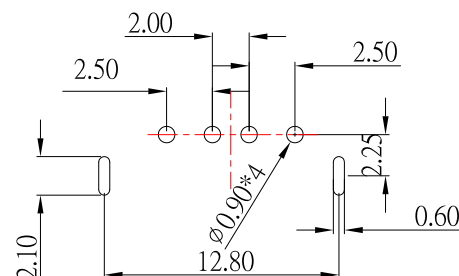

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:


- 1.Contact Resistance: 30 m Ω Max
- 2.Insulation Resistance: 1,000 M Ω Min
- 3.Dielectric Withstanding Voltage: 500 V DC

Material:

- 1.Housing: PBT, UL 94V-0
- 2.Contact: BRASS
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

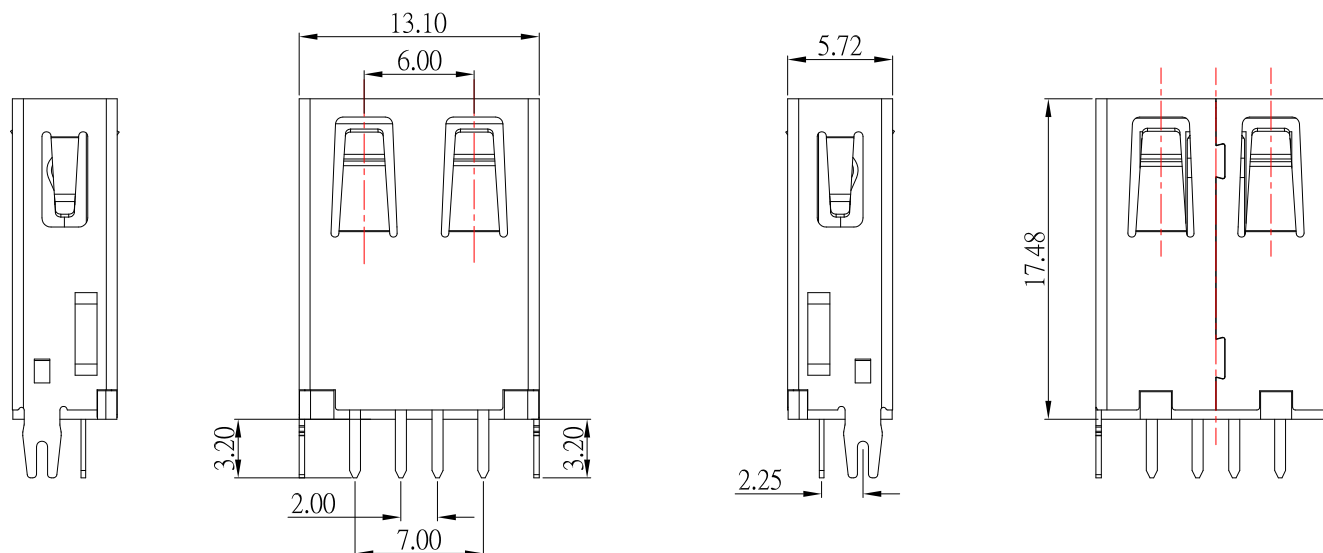

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/17/22
DATE: 06/17/22
DATE: 06/17/22

MATL		TITLE	CONNECTOR
FINISH		MODLE	USB A/F 插板 無捲邊直腳 L:17.5mm
SCALE	1 : 1	DWG NO.	SUA-110V8I-x-S329
SHEET NO.	1 of 1	PART NO.	SUA-110V8I-x-S329

SIZE
A4
VER
R1

1	更新樣式	Jack	061722
ITEM NO.	DESCRIPTION	DRAWN	DATE