

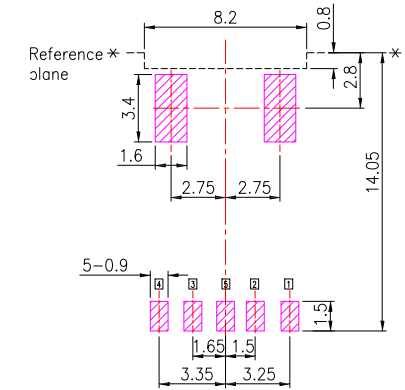
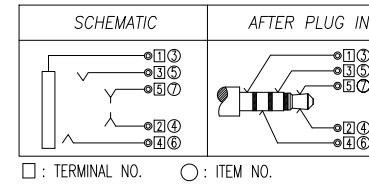
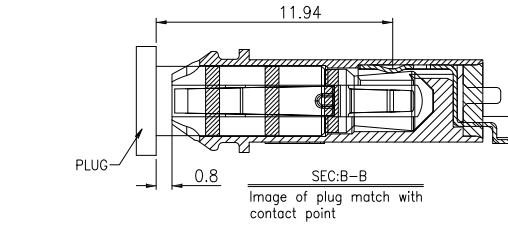
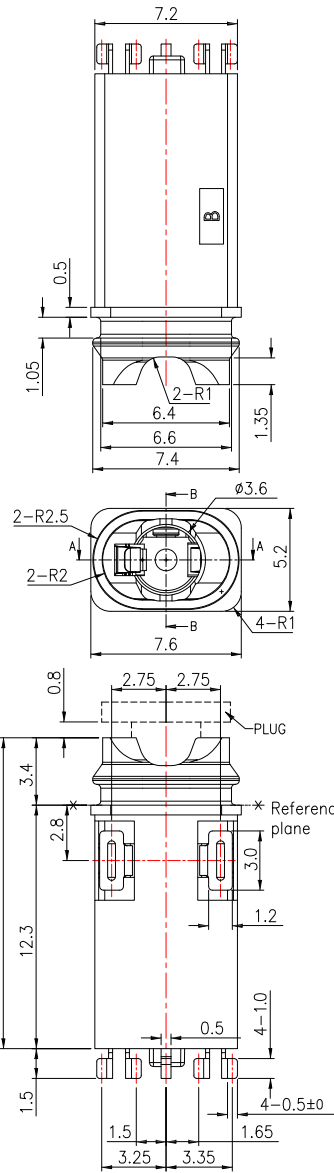
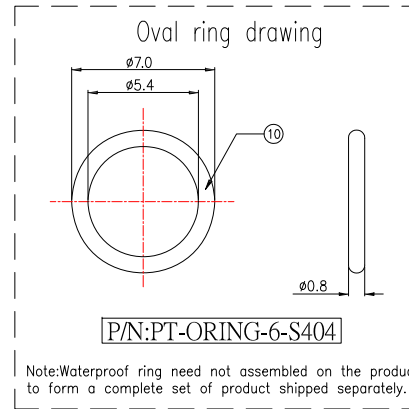




Recommended PCB Layout
(Top view)

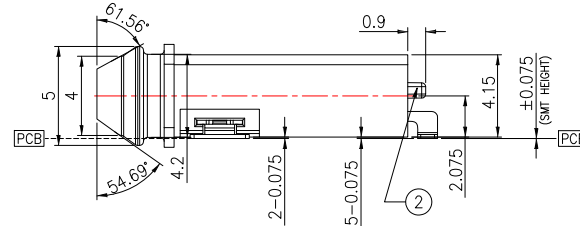

Note: Waterproof ring need not assembled on the product,
to form a complete set of product shipped separately.

SPECIFICATION

- 1.Contact resistance : $\leq 30m\Omega$
- 2.Insulation resistance : $\geq 100M\Omega$
- 3.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 4-20N
- 6.life test : 5,000 cycles
- 7.Waterproof Lever: IPx7

⑩	OVAL RING	----	1	SILICONE	
⑨	BOND	----	1		----
⑧	TERMINAL	----	2	C2680	Ti PLATED OVER Ni
⑦	TIP SPRING-2	⑤	1	Ti-Cu	Ni PLATED OVER Au
⑥	RING SPRING-2	④	1	Ti-Cu	Ni PLATED OVER Au
⑤	RING SPRING-1	③	1	Ti-Cu	Ni PLATED OVER Au
④	TIP SPRING-1	②	1	Ti-Cu	Ni PLATED OVER Au
③	EARTH SPRING	①	1	Ti-Cu	Ni PLATED OVER Au
②	COVER	----	1	PA9T	
①	HOUSING	----	1	PA9T	
ITEM	PART NAME	TERMINAL	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu 04/12/19
CHECKED BY: Jacky Chen 04/12/19
APPROVED BY: Tony Kao 04/12/19

MAT'L	TITLE	JACK
FINISH	MODLE	3.5mm PHONE JACK 防水型
SCALE 1 : 1	DWG NO.	PJ-WP35408E-S404
SHEET NO.	PART NO.	PJ-WP35408E-S404
		SIZE A4
		VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE