
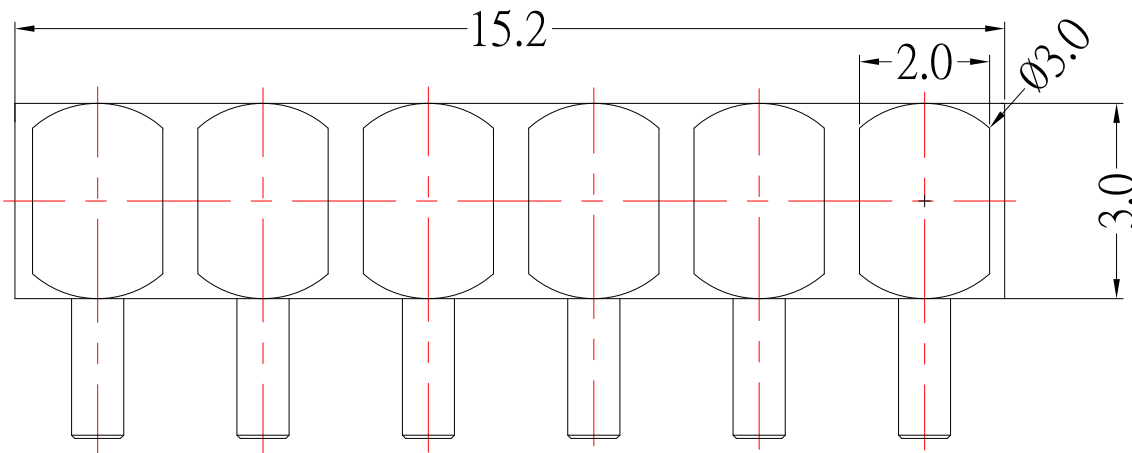
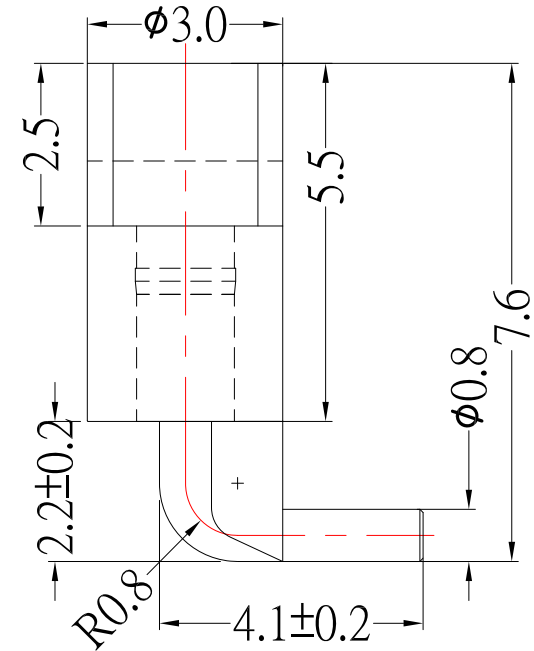


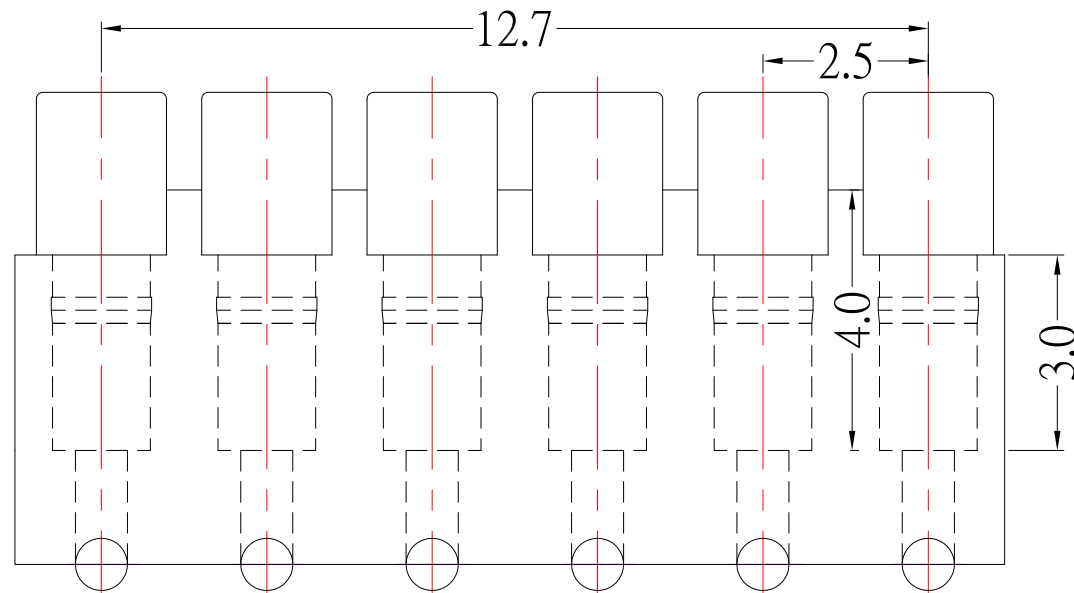

NOTE

1.Material

cj: Brass 3602

2.Plating

cj: Au over NI

3.Electrical

Rated current & voltage: DC 12V; 1.0A Max

4.To ensure the best usage,please operate it based on the working height

Based on the engineering drawings,shall not exceed the maximum allowed compression

5.To avoid arcing issue, The adaptor start to power supply after connector mated fully.

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

10/19/17

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

10/19/17

FINISH

MODLE

POGO PIN

APPROVED BY:

Tony Kao

DATE

10/19/17

SCALE

1 : 1

DWG NO.

PGC-20765-6P-S353

SIZE

A4

VER

R

ITEM NO.

DESCRIPTION

DRAWN

DATE

A

B

C

D

E

F

G

H

I

J