
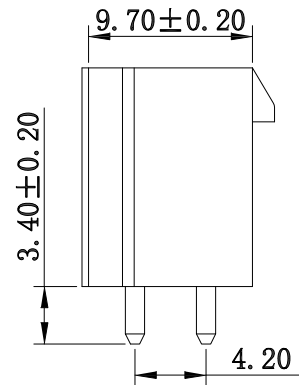


P.C.B LAYOUT MOUNTING PATTERN

PART NO.	Dimensions (mm)	
	A	B
02	—	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

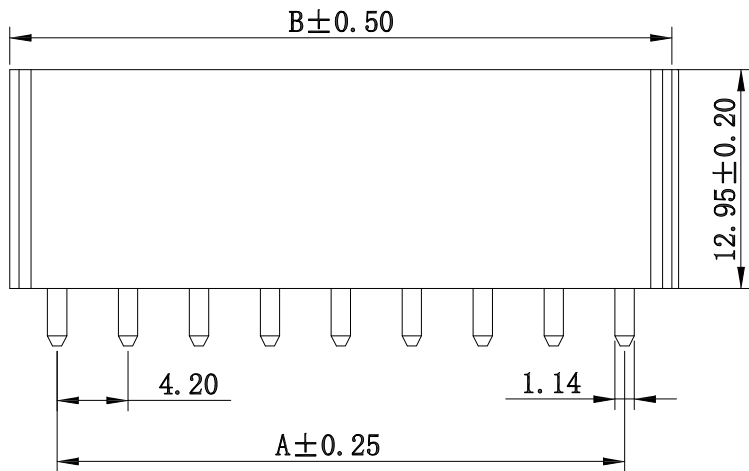

SPECIFICATIONS

Current rating : 7.0A AC , DC

Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1,000 M Ω min.

Withstand voltage : 1500V AC/minute

Contact resistance : 10 m Ω max.

Material:

Housing : Nylon 66

Pin : Brass / Tin-plated



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 07/05/19
DATE: 07/05/19
DATE: 07/05/19

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MINI FIT JR VERTICAL POWER CONNECTOR
PH: 4.2mm
WF-4255VD2xx-S304
WF-4255VD2xx-S304
SIZE: A4
VER: R1