


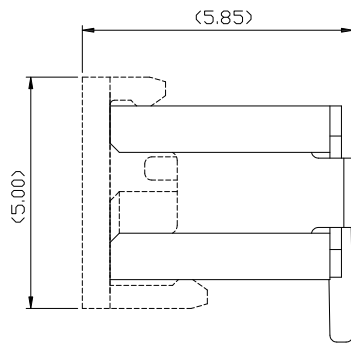
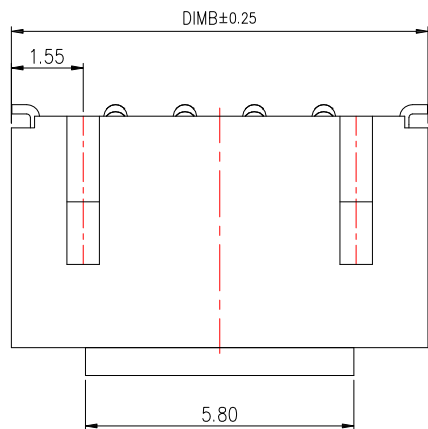


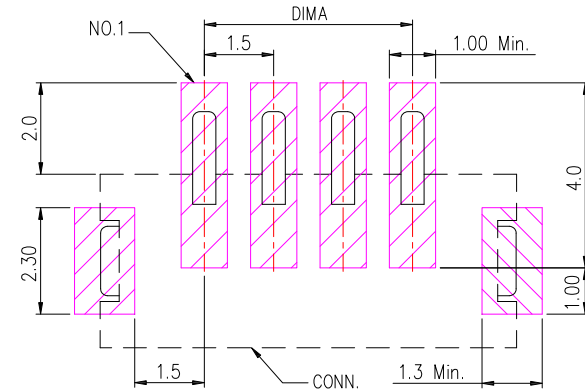

With Cover

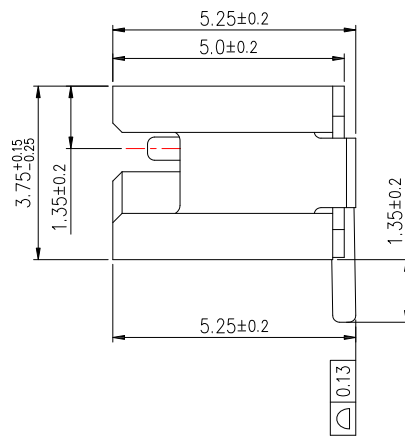

P.C.B LAYOUT

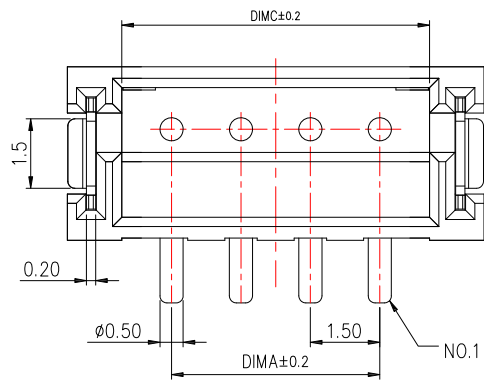

SPECIFICATIONS:

- 1.Current rating : 1.0A , AC / DC
- 2.Voltage rating : 100V, AC / DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 500M Ω min.
- 5.Contact resistance : 20m Ω /Max

Material:

- 1.Housing : LCP , Natural
- 2.Contact : Brass,Tin over Nickel
- 3.Peg : Brass,Tin over Nickel

CKT	DIM A	DIM B	DIM C
2	1.50	6.00	3.65
3	3.00	7.50	5.15
4	4.50	9.00	6.65
5	6.00	10.50	8.15
6	7.50	12.00	9.65
7	9.00	13.50	11.15
8	10.50	15.00	12.65
9	12.00	16.50	14.15
10	13.50	18.00	15.65
11	15.00	19.50	17.15
12	16.50	21.00	18.65
13	18.00	22.50	20.15
14	19.50	24.00	21.65
15	21.00	25.50	23.15
16	22.50	27.00	24.65
17	24.00	28.50	26.15
18	25.50	30.00	27.65
19	27.00	31.50	29.15
20	28.50	33.00	30.65

5	更新CAP尺寸	Jack	042325
4	更新圖面	Jack	020525
3	更新平整度	Jack	041223
2	更新圖面	Jack	121318
1	更新為A0版	Jack	040617
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	04/23/25	FINISH	MODLE	WAFER 1.5 SMT 180度
CHECKED BY:	DATE	SCALE	DWG NO.	WF-1501VSxx-S304
Jacky Chen	04/23/25	1 : 1	PART NO.	WF-1501VSxx-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/23/25			