
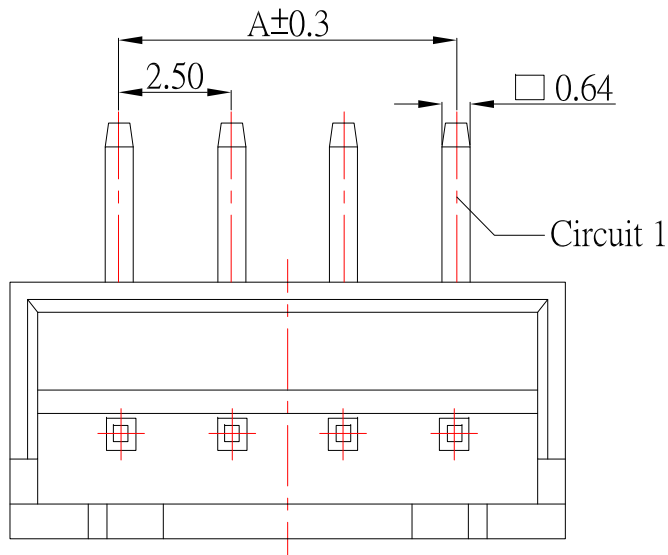
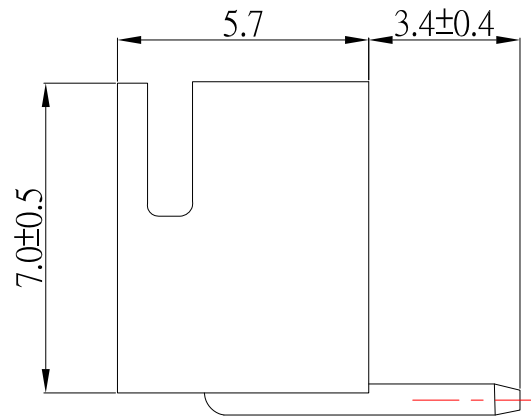


P.C.B LAYOUT MOUNTING PATTERN

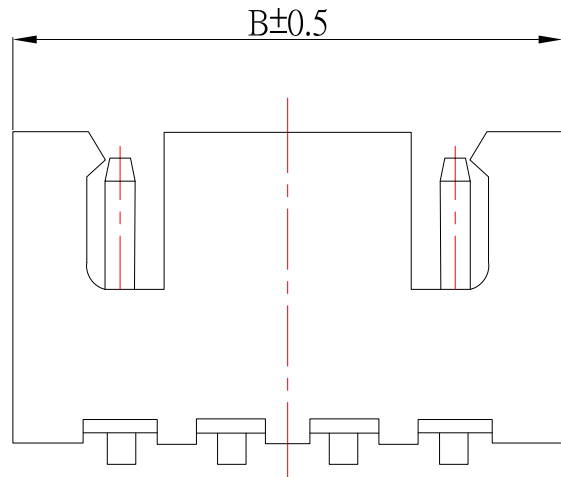

PART NO.	Dimensions	
	A	B
WF-2501RD02	2.50	7.50
WF-2501RD03	5.00	10.00
WF-2501RD04	7.50	12.50
WF-2501RD05	10.00	15.00
WF-2501RD06	12.50	17.50
WF-2501RD07	15.00	20.00
WF-2501RD08	17.50	22.50
WF-2501RD09	20.00	25.00
WF-2501RD10	22.50	27.50
WF-2501RD11	25.00	30.00
WF-2501RD12	27.50	32.50
WF-2501RD13	30.00	35.00
WF-2501RD14	32.50	37.50
WF-2501RD15	35.00	40.00
WF-2501RD16	37.50	42.50
WF-2501RD17	40.00	45.00
WF-2501RD18	42.50	47.50
WF-2501RD19	45.00	50.00
WF-2501RD20	47.50	52.50

SPECIFICATIONS

Current rating : 3.0A

Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1,000 MΩ min.

Withstand voltage : 1000V AC/minute

Contact resistance : 20 mΩ/Max

Material:

Housing : Nylon 66, UL94V-2

Pin : Brass / Tin-plated



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
09/05/17
DATE
09/05/17
DATE
09/05/17

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
WAFER 2.5 DIP 90度
WF-2501RDxx-S304
WF-2501RDxx-S304

SIZE
A4
VER
R