
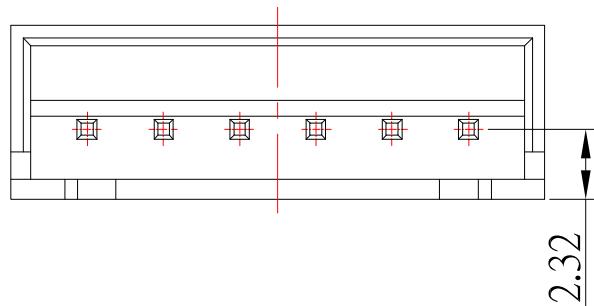
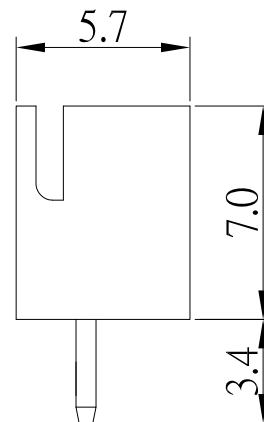


P.C.B LAYOUT MOUNTING PATTERN

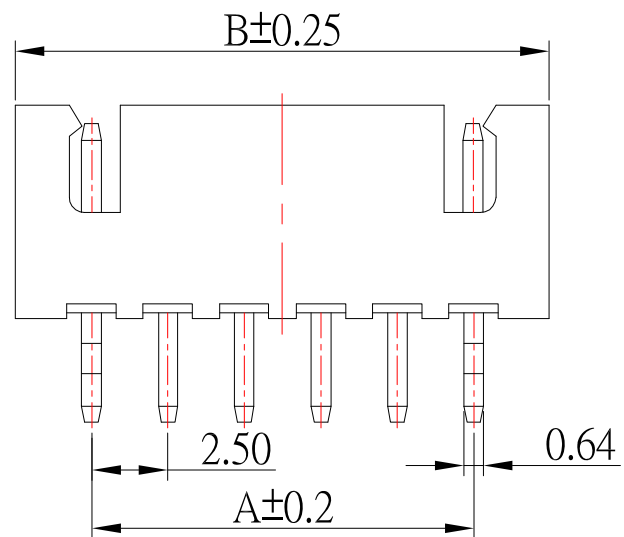

	DIM. A	DIM. B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

SPECIFICATIONS

- 1.Current rating : 3.0A
- 2.Temperature rating : -25°C ~ +85°C
- 3.Insulation resistance : 1000M Ω min.
- 4.Contact resistance : 20m Ω / Max

Material:

Housing : PA66

Contact : Brass , Tin plated over Nickel

8	更新尺寸位置	Jack	070523
7	新增尺寸	Jack	070323
6	更新圖面	Jack	080922
5	新增尺寸	Jack	081320
4	更新樣式	Lan	041819
3	更新圖面	Jack	040219
2	更新尺寸	Jack	062917
1	更新材質	Jack	041116
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
07/05/23
DATE
07/05/23
DATE
07/05/23

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	2.54 WAFER 180 度 H:7.0mm
SCALE	1 : 1	DWG NO.	WF-2501VDxx-S304
SHEET NO.	1 of 1	PART NO.	WF-2501VDxx-S304
		SIZE	A4
		VER	R8