



PH-B11-32xxx-S304

L高度選項

PIN數選項





	L1	L2	L3
A	4.00	2.00	2.80
B	5.00	2.00	1.50
C	3.80	2.00	3.00
D	3.00	3.50	3.00
E	4.00	1.50	2.80
F	8.00	2.00	2.80
G	7.00	2.00	2.80
H	4.00	2.00	2.20
J	2.00	2.00	2.80

Specifications

- 1.Current Rating : 1.5 Amp
- 2.Insulator Resistance : 1000 MΩ Min.
- 3.Contact Resistance : 20 mΩ Max.
- 4.Dielectric Withstanding : AC 500 V
- 5.Operating Temperature : -40°C ~ +105°C

Materials:

- 1.Contact Material : Brass, Au over Ni
- 2.Insulator Material :PA6T

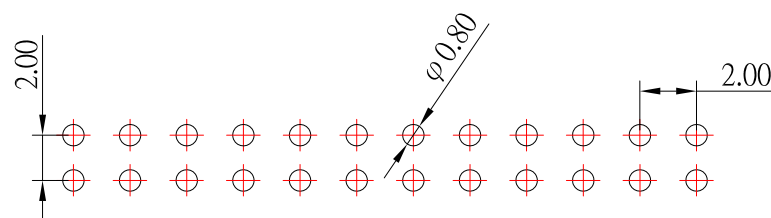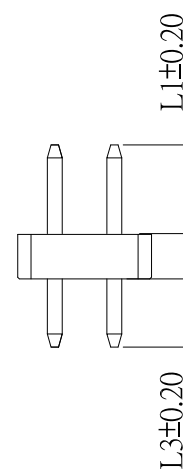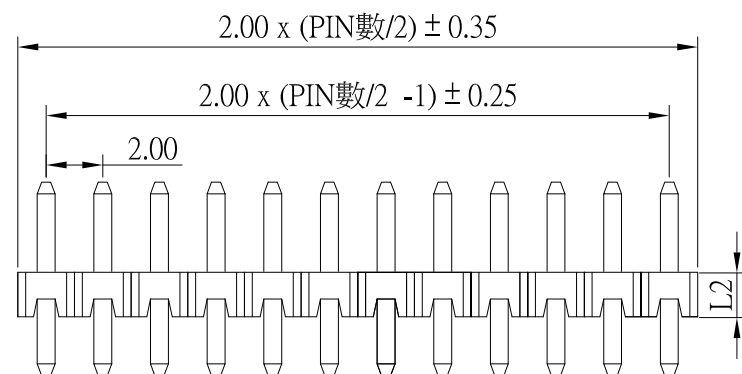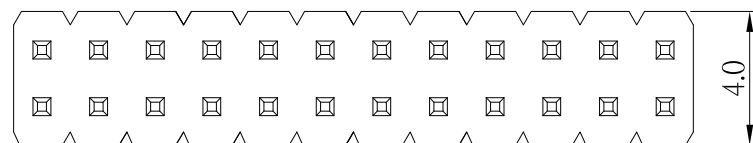

PCB LAYOUT

7	更新圖面樣式	Jack	022521
6	新增"J"選項	Jack	030419
5	新增"H"選項	Jack	011819
4	新增"G"選項	Jack	052518
3	新增"F"選項	Jack	102017
2	新增"E"選項	Jack	092817
1	新增"D"選項	Jack	041216
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	02/25/21
CHECKED BY:	DATE
Jacky Chen	02/25/21
APPROVED BY:	DATE
Tony Kao	02/25/21

MAT'L		TITLE	Pin Header
FINISH		MODLE	2.0排針 雙排 V/T DIP
SCALE	1 : 1	DWG NO.	PH-B11-32xxx-S304
SHEET NO.	1 of 1	PART NO.	PH-B11-32xxx-S304
		SIZE	A4
		VER	R7