

— PIN數





	L1	L2	L3
A	6.0	4.0	3.0
B	6.0	4.5	3.0
C	2.0	4.5	2.0
D	1.5	4.3	1.5
E	4.0	4.2	2.8
F	4.0	8.2	2.8

Specifications

- 1.Current Rating : 1.5 Amp
- 2.Insulator Resistance : 1000 M Ω Min.
- 3.Contact Resistance : 20 m Ω Max.
- 4.Dielectric Withstanding : AC 500 V
- 5.Operating Temperature : -40°C ~ +105°C

Materials:

- 1.Contact Material : Phosphor Bronze, Au over Ni
- 2.Insulator Material :PA6T

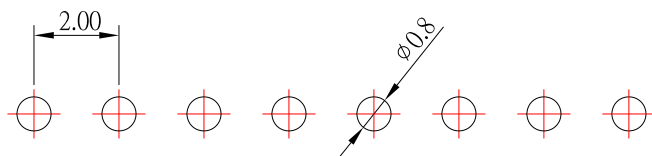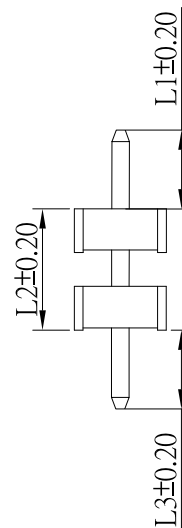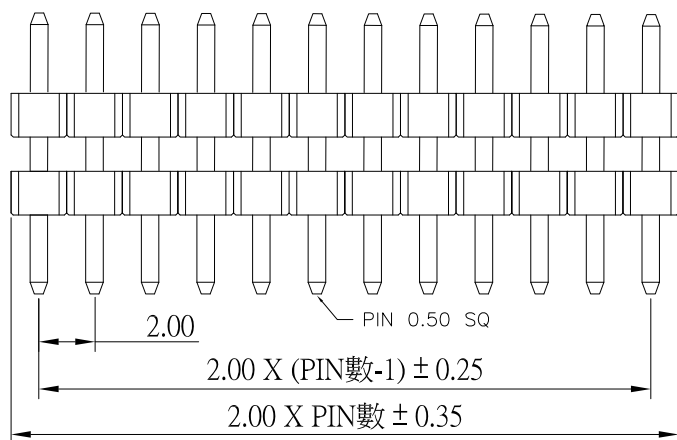

PCB LAYOUT

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3 3RD. ANGEL'S  UNITS MM	DRAWN BY: DATE		MAT'L		TITLE	Pin Header	
4	新增PIN選項	Jack	071819		CHECKED BY: DATE		FINISH		MODLE	2.0排針 雙塑單排 180度	
3	新增PIN選項	Jack	060319		Jacky Chen 07/18/19		SCALE	1 : 1	DWG NO.	PH-B21-31xxx-S304	SIZE
2	新增PIN選項	Jack	022317		APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	PH-B21-31xxx-S304	VER
1	新增PIN選項	Jack	112516		Tony Kao 07/18/19						
ITEM NO.	DESCRIPTION	DRAWN	DATE							R4	
	A	B	C	D	E	F	G	H	I	J	