



FH-C5C1-32xxxC-S304

PIN數





	L1	L2	L3
A	4.3	4.8	3.1
B	3.4	4.8	3.0

SPECIFICATIONS:

- 1.Current Rating : 1.0 A
- 2.Insulation Resistance : 1,000MΩ Min
- 3.Contact Resistance : 20mΩ Max
- 4.Operation Temperature : -40°C to +105°C

MATERIALS:

- 1.Insulator : PA6T
- 2.Contact : Phosphor Bronze
- 3.Contact Plating : Gold over Nickel

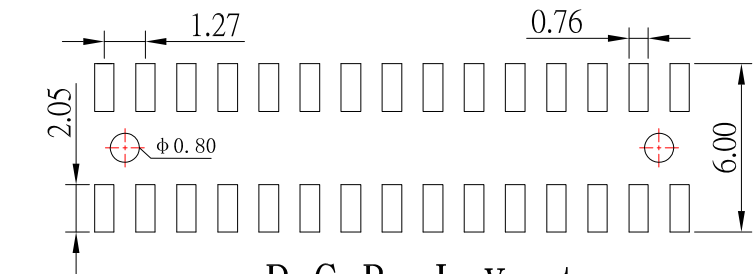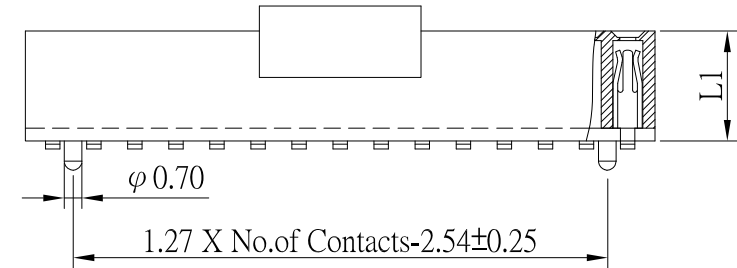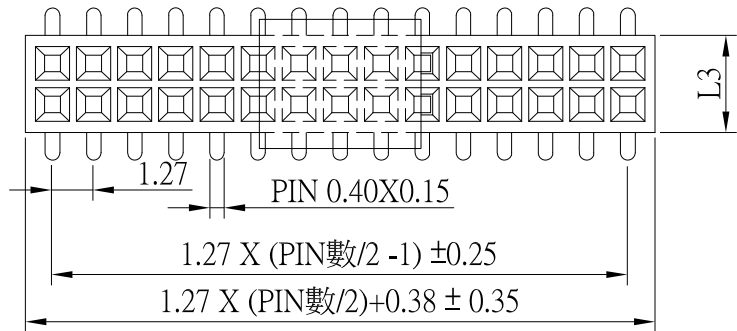

P. C. B. Layout

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MATL	TITLE	Female Header
Jack Lu	09/17/20	FINISH	MODLE	1.27 Female Header SMT 2*X PIN數加CAP
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	09/17/20	1 : 1	FH-C5C1-32xxxC-S304	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	09/17/20	1 of 1	FH-C5C1-32xxxC-S304	R1