

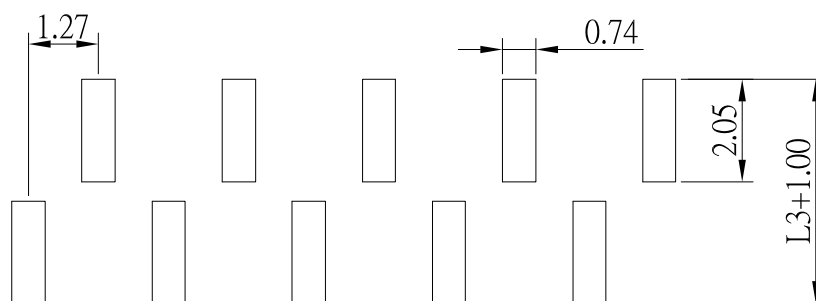



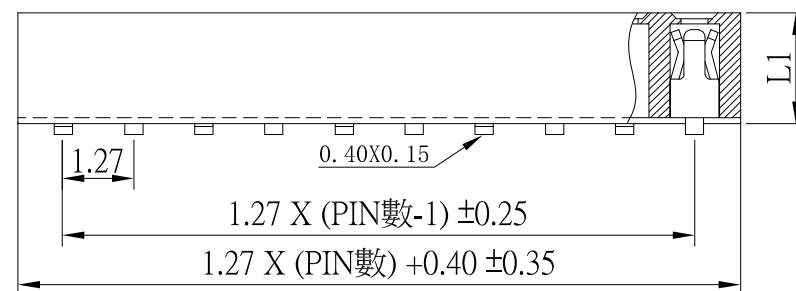

FH-C81-31xxx-S304

	L1	L2	L3	L4
A	2.10	2.35	3.25	2.00
B	4.30	4.55	3.50	1.90

PIN選項

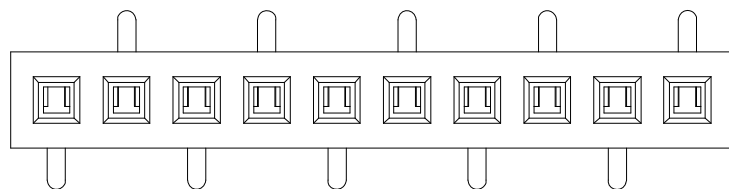

P.C.B. Layout

SPECIFICATIONS:

- 1.Current Rating : 1.0 AMP
- 2.Insulation Resistance : 1000M Ω Min
- 3.Dielectric Withstanding : AC 500V
- 4.Contact Resistance : 20m Ω Max
- 5.Operation Temperature : -40°C to +105°C

MATERIALS:

- 1.Contact Material : Phosphor Bronze
- 2.Insulator Material : PA6T
- 3.Contact Finish : Au over Nickel



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
10/20/21
DATE
10/20/21
DATE
10/20/21

MATL
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

Female Header
1.27排母 單排 SMT 180 度 左下為第一PIN
FH-C81-31xxx-S304
FH-C81-31xxx-S304

SIZE
A4
VER
R1