







FH-B31-x2xxxC-S304

Insulator Material:

2 : LCP
3 : PA6T

PIN數

	L1	L2	L3	L4
A	4.00	4.30	6.20	4.00
B	4.30	4.60	6.00	4.00
C	4.30	4.60	6.20	4.00
D	6.35	6.75	6.40	4.00

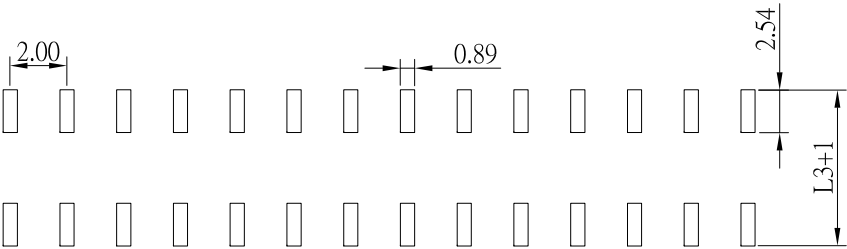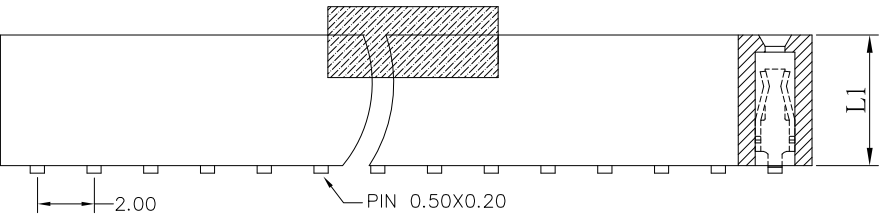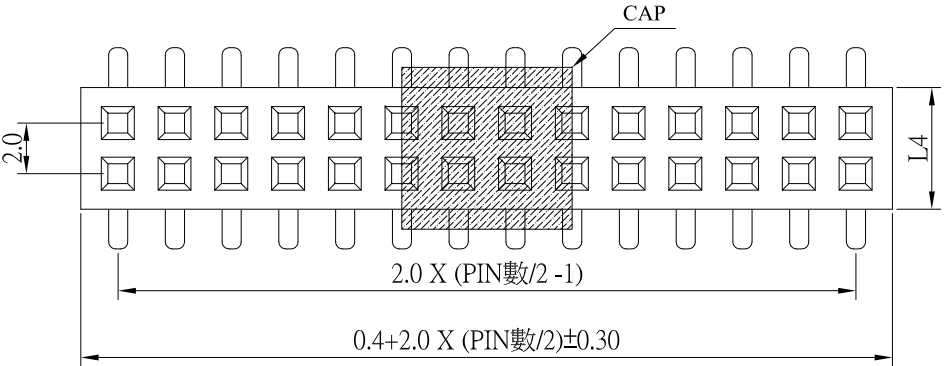

P.C.B. LAYOUT

SPECIFICATIONS:

- 1.Current Rating : 1.5 AMP
- 2.Insulation Resistance : 1000MΩ Min
- 3.Dielectric Withstanding : 500V AC
- 4.Contact Resistance : 20mΩ Max

MATERIALS:

- 1.Contact : Brass
- 2.Insulator : Polyester
- 3.Contact Finish : Gold Plated over Nickel

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.				DRAWN BY: DATE		MAT'L		TITLE		Female Header									
4		新增尺寸選項						Jack		061521		Jack Lu		06/16/21		FINISH		MODLE		Female Header 加CAP			
3		新增尺寸選項		Jack		031920		CHECKED BY: DATE		Jacky Chen		06/16/21		SCALE		1 : 1		DWG NO.		FH-B31-x2xxxC-S304		SIZE	
2		新增尺寸選項		Jack		031320		APPROVED BY: DATE		Tony Kao		06/16/21		SHEET NO.		1 of 1		PART NO.		FH-B31-x2xxxC-S304		A4	
1		新增材質選項		Jack		102919		TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°		3RD. ANGEL'S				UNITS		MM		VER			
ITEM NO.		DESCRIPTION		DRAWN		DATE														R4			
A		B		C		D		E		F		G		H		I		J					