



FH-A12-02xxx-S304

PIN數




	L1	L2	L3
A	8.5	1.2	3.1

SPECIFICATIONS:

- 1.Current Rating : 3.0 AMP
- 2.Insulation Resistance : 1000MΩ Min
- 3.Dielectric Withstanding : 1000V AC
- 4.Contact Resistance : 20mΩ Max
- 5.Operation Temperature : -40°C to +105°C

MATERIALS:

- 1.Contact : Phosphor Bronze
- 2.Insulator : PBT ,UL94V-0
- 3.Contact Finish : Gold over Nickel

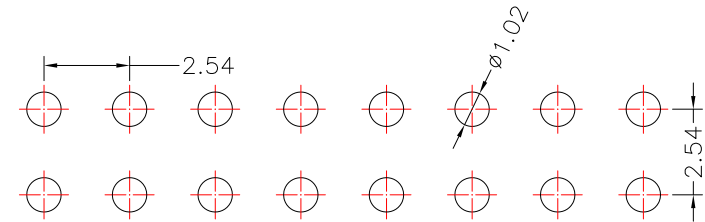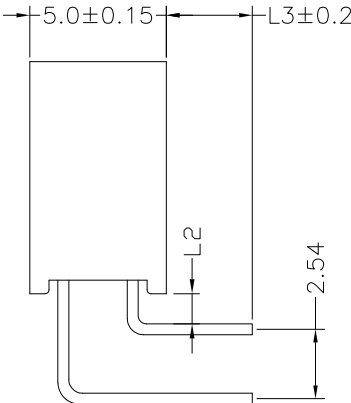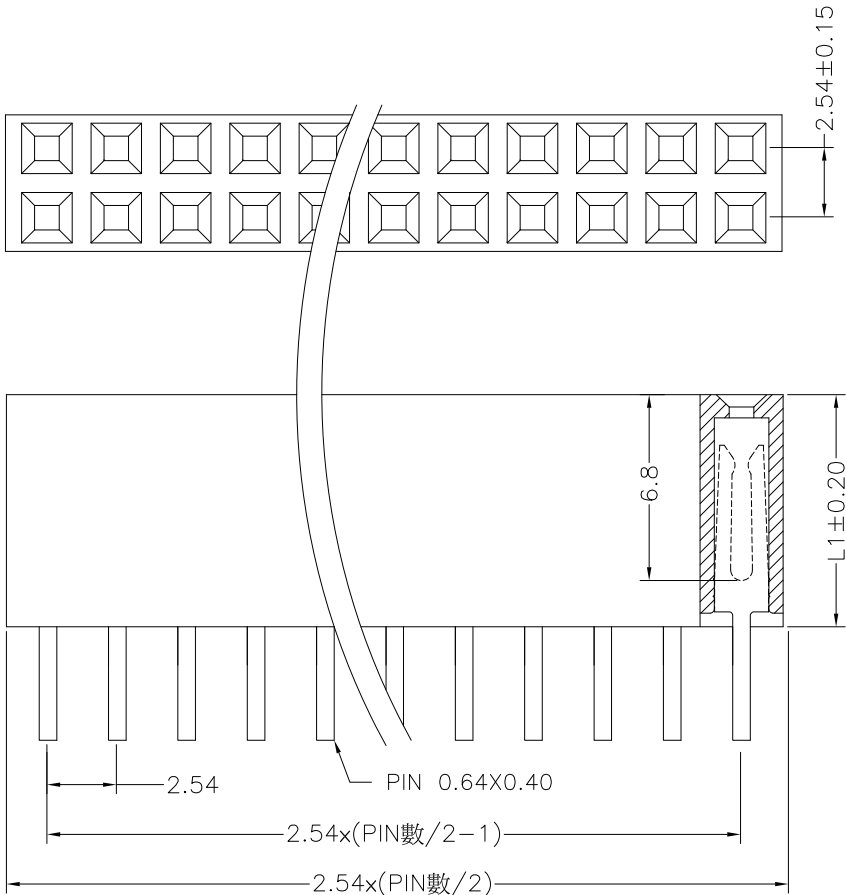

P.C.B. LAYOUT

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	Female Header
Jack Lu	08/07/17	FINISH	MODLE	2.54 排母 雙排 R/A
CHECKED BY:	DATE	SCALE	DWG NO.	FH-A12-02xxx-S304
Jacky Chen	08/07/17	1 : 1	PART NO.	FH-A12-02xxx-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	08/07/17			