



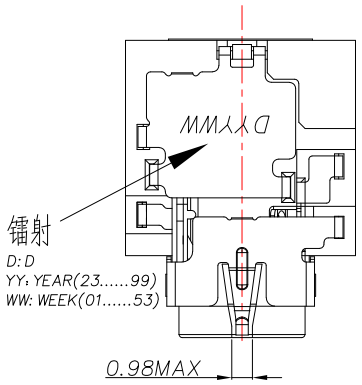


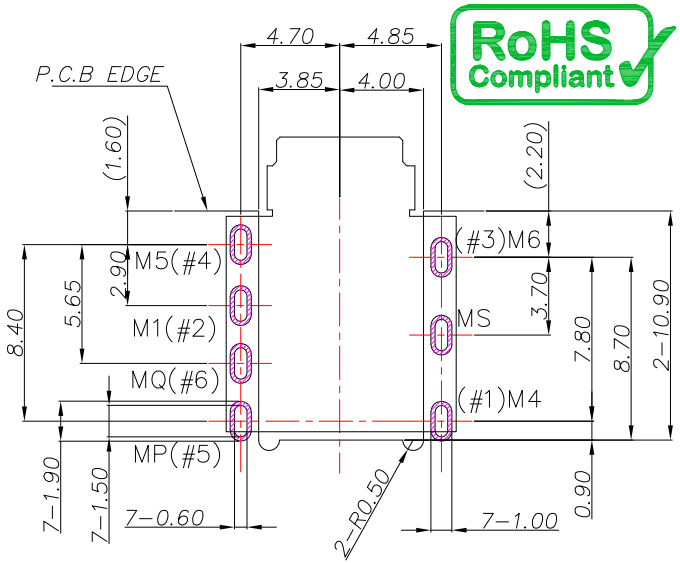



P.C.B LAYOUT
TOP VIEW

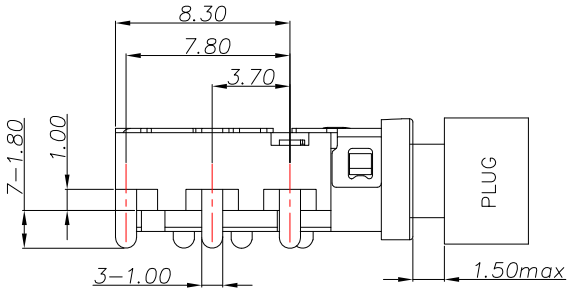


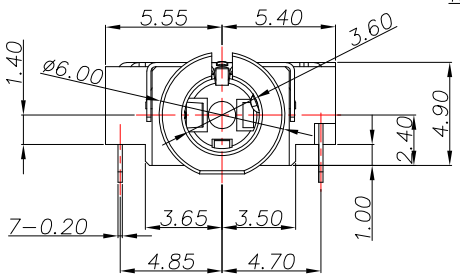

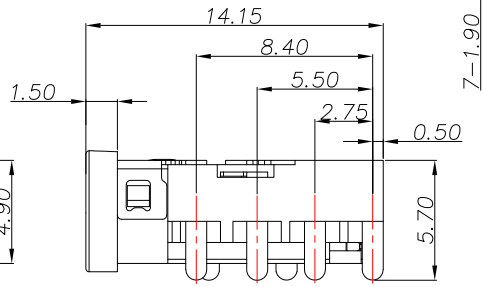

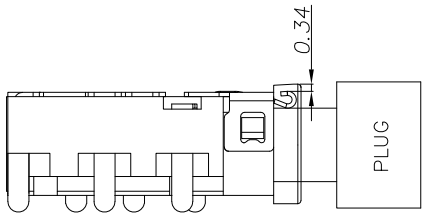

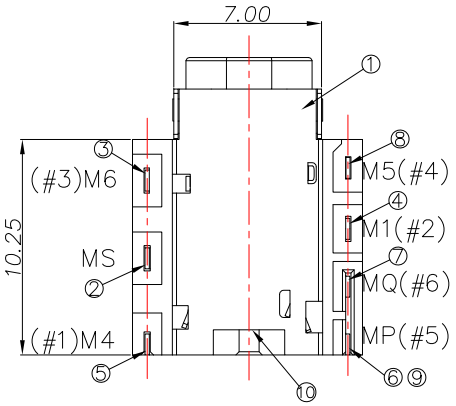



SPECIFICATION

1.Contact resistance：≤ 50mΩ
2.Insulation resistance：≥100MΩ
3.Withstand voltage：250VAC
4.Insertion and extraction force：3-30N
5.life test：5,000 cycles

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY
⑩	DUMMY PIN	STAINLESS STEEL	—	1
⑨	SEPARATOR	PA9T	BLACK	1
⑧	M5_CONTACT	PHOSPHOR BRONZE	Au: GOLD FLASH Ni	1
⑦	MQ_SHUNT	PHOSPHOR BRONZE		1
⑥	MP_CONTACT	PHOSPHOR BRONZE		1
⑤	M4_CONTACT	PHOSPHOR BRONZE		1
④	M1_CONTACT	PHOSPHOR BRONZE		1
③	M6_CONTACT	PHOSPHOR BRONZE		1
②	MS_SHELL	PHOSPHOR BRONZE	Ni	1
①	P1_HOUSING	PA9T	BLACK	1

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新日期樣式	Jack	080825
3	更新樣式	Jack	051525
2	更新樣式	Jack	060623
1	更新樣式和材質和鍍層	Jack	111722

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 08/08/25	MAT'L	
CHECKED BY: Jacky Chen	DATE 08/08/25	FINISH	
APPROVED BY: Tony Kao	DATE 08/08/25	SCALE	1 : 1
		SHEET NO.	1 of 1

TITLE	JACK		
MODLE	PHONE JACK		
DWG NO.	PJ-S3R2A7-S214	SIZE	A4
PART NO.	PJ-S3R2A7-S214	VER	R4