

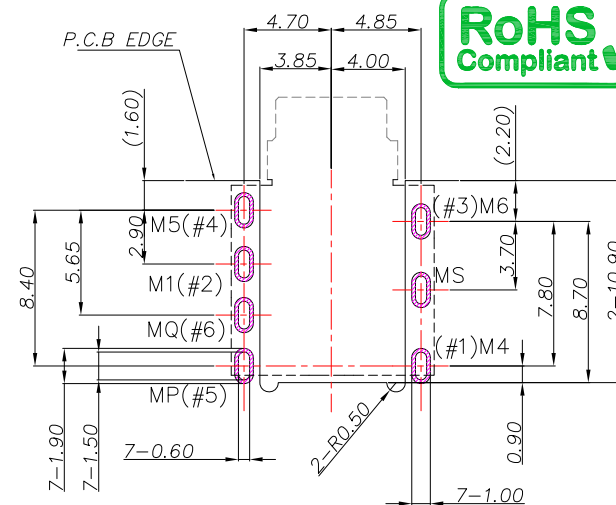
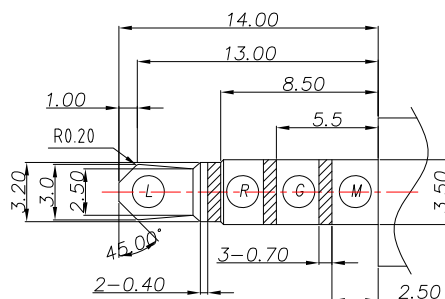
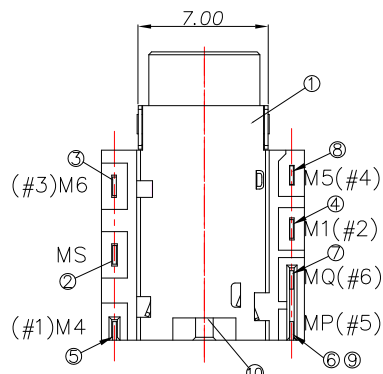
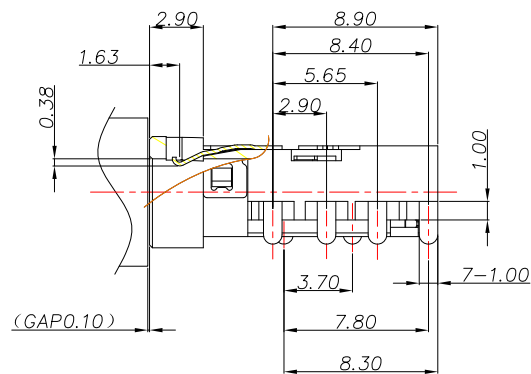


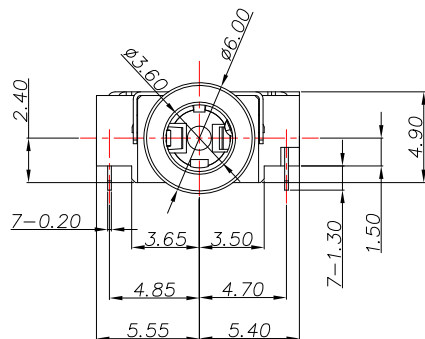

P.C.B LAYOUT
TOP VIEW

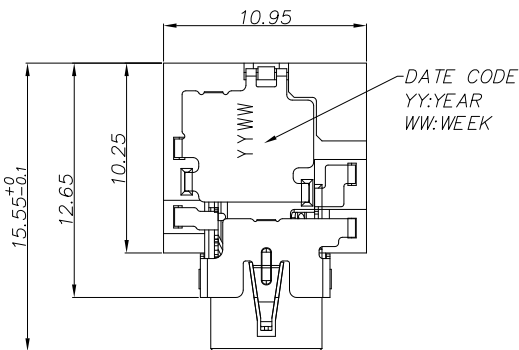

SCHEMATIC	
	•M6(#3)G/M
	✓•M4(#1)L/R
	△•MP(#5)
	⬇•MQ(#6)
	⋈•M1(#2)R/L
	⋈•M5(#4)M/G

SPECIFICATION

- 1.Contact resistance : $\leq 50\text{m}\Omega$
- 2.Insulation resistance : $\geq 100\text{M}\Omega$
- 3.Withstand voltage : 250VAC
- 4.Insertion and extraction force : 3-30N
- 5.life test : 5,000 cycles

⑩	DUMMY PIN	STAINLESS STEEL	—	1
⑨	SEPARATOR	PA9T	BLACK	1
⑧	M5_CONTACT	C5210	GOLD FLASH ON CONTACT AREA.AND SOLDER AREA ALL OVER Ni	1
⑦	MQ_SHUNT	C5210		1
⑥	MP_CONTACT	C5210		1
⑤	M4_CONTACT	C5210		1
④	M1_CONTACT	C5210	Ni	1
③	M6_CONTACT	C5210		1
②	MS_SHELL	C5210	Ni	1
①	P1_HOUSING	PA9T	BLACK	1
ITEM	DESCRIPTIONs	MATERIAL		Q'TY

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/31/19			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	10/31/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3R4A7-S214
Tony Kao	10/31/19	1 : 1	PART NO.	PJ-S3R4A7-S214
		SHEET NO.	1 of 1	