

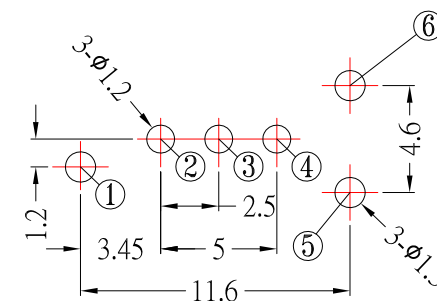


SCHEMATIC

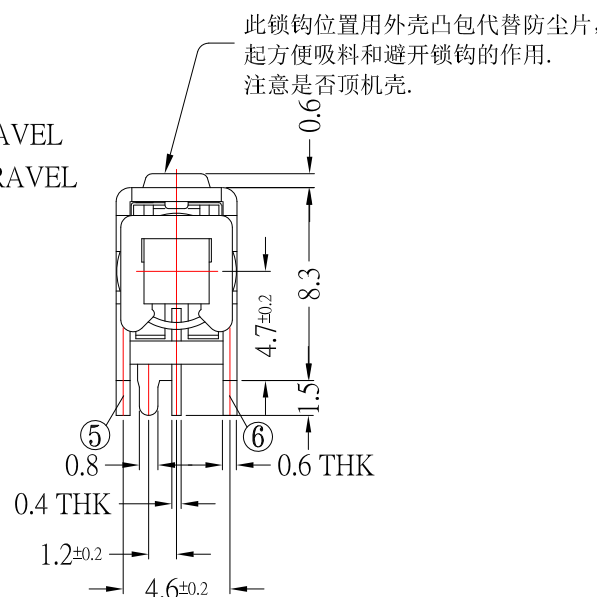

P.C.B LAYOUT MOUNTING PATTERN
TOP VIEW

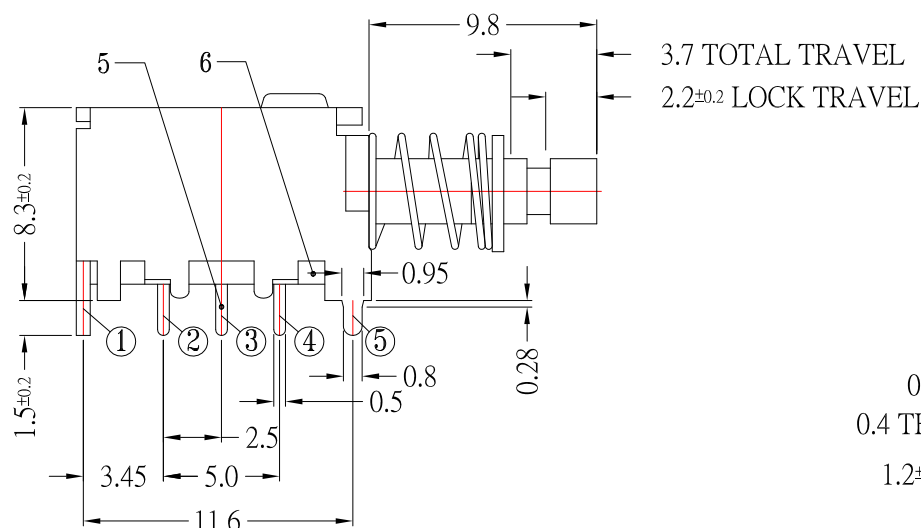

SPECIFICATIONS

- 1.Rating : DC 12V, 2.0A
- 2.Circuit : 1P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 350 ± 100gf
- 5.Life test : 10,000 cycles

9	Contact Clip	1	PBS	Ag-Plating
8	Cam Stick	1	SUS	Ni-Plating
7	Spring Plate	1	PBS	Ni-Plating
6	Base	1	Phenolic Resin	Natural
5	Terminal	3	BRASS	Ni-Plating
4	Knob	1	LCP(Black)	
3	Block	1	Stainless Steel	Ni-Plating
2	Spring	1	Steel Wire	Ni-Plating
1	Frame	1	Stainless Steel	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE
Jack Lu	04/24/23		SWITCH
CHECKED BY:	DATE	FINISH	MODLE
Jacky Chen	04/24/23		PUSH SW 1P2T SMT TYPE 2A 12VDC
APPROVED BY:	DATE	SCALE	DWG NO.
Tony Kao	04/24/23	1 : 1	PS-12E053S-B-S191
		SHEET NO.	PART NO.
		1 of 1	PS-12E053S-B-S191
			SIZE
			A4
			VER
			R