

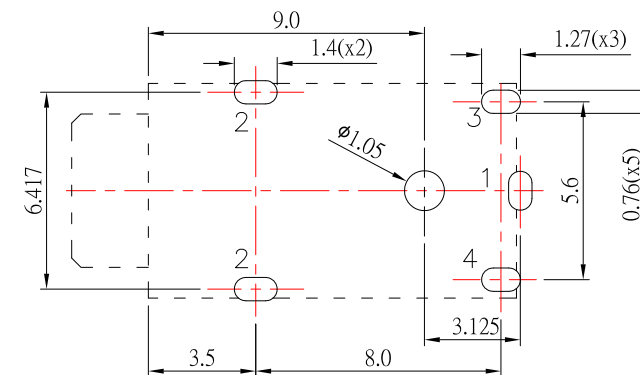
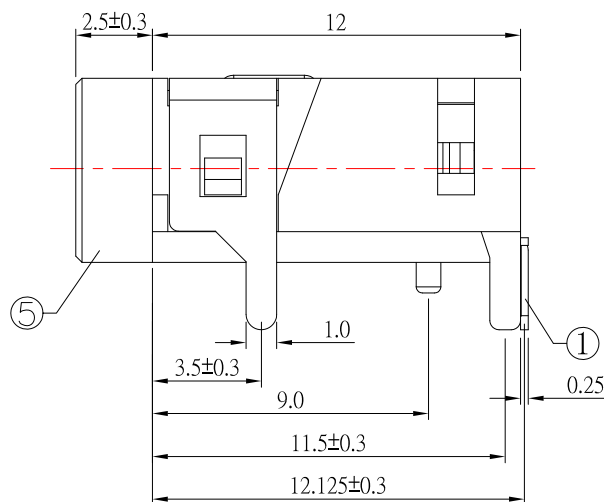
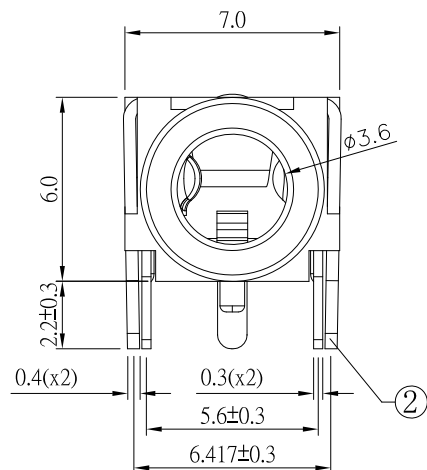



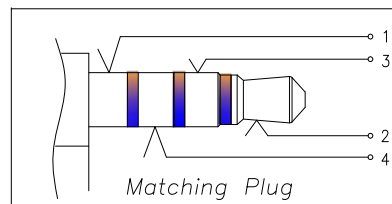

P.C.B LAYOUT

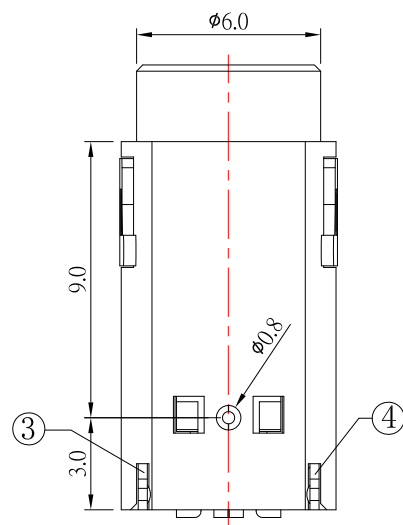

SPECIFICATION

- 1.Rating : DC 30V,0.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles °

5	HOUSING	1	PA9T	
4	RING SPRING	1	PHOSPHOR BRONZE	Ag Plated over Ni
3	RING SPRING	1	PHOSPHOR BRONZE	Ag Plated over Ni
2	TIP SPRING	1	BRASS	Ag Plated over Ni
1	EARTHING SPRING	1	PHOSPHOR BRONZE	Ag Plated over Ni
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	03/17/23			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	03/17/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D321B-S214
Tony Kao	03/17/23	1 : 1		
		SHEET NO.	PART NO.	PJ-D321B-S214
				SIZE
				A4
				VER
				R

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------