

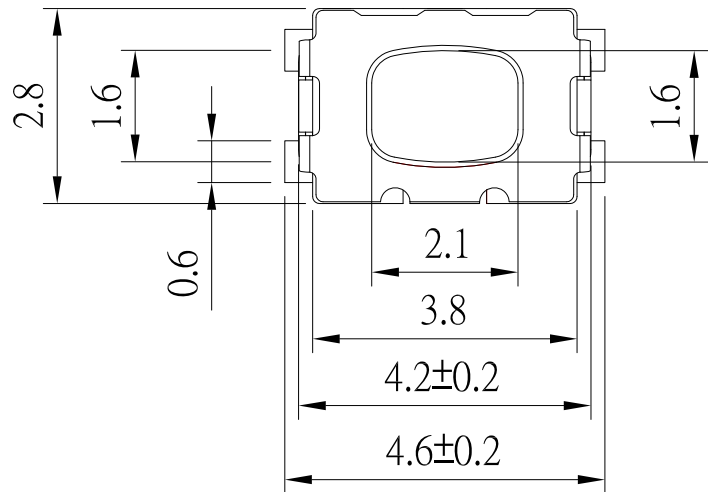
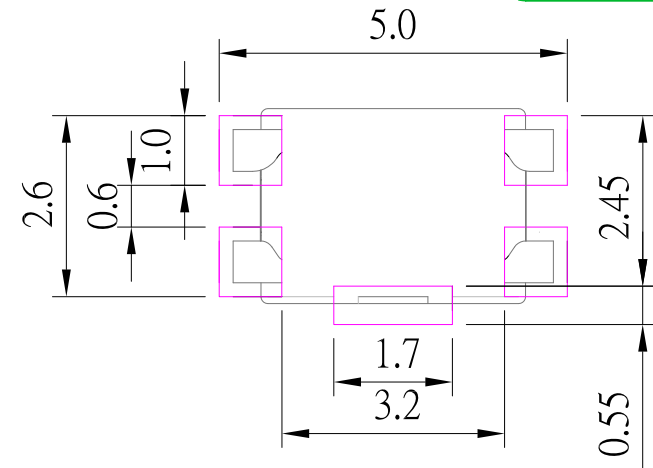


CIRCUIT DIAGRAM



PCB LAYOUT

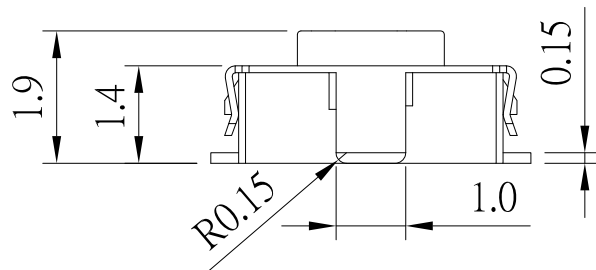

SPECIFICATIONS

Rating	DC 12V, 100mA.
Insulation Resistance	100 MΩ Min.
Contact Resistance	100 mΩ Max.
Operating Force	400 ± 80gf
Operating Life (cycles)	100,000

F	TERMINAL	4	PHOSPHOR BRONZE	Ag Plated
E	FILM	1	POLYIMIDE	Yellow
D	CONTACT	2	SUS	Ag Plated
C	COVER	1	SUS	
B	BASE	1	PA	Black
A	STEM	1	SILICON	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	04/25/23	FINISH	MODLE	TACT SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	TS-A85FPG-7K-S246
Jacky Chen	04/25/23	1 : 1	PART NO.	TS-A85FPG-7K-S246
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/25/23			