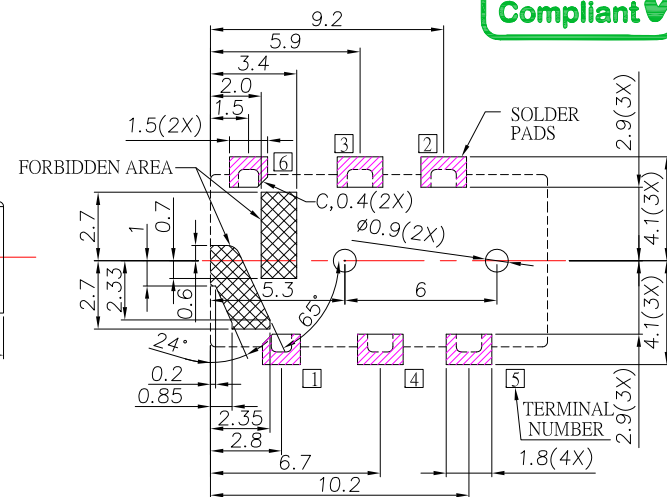

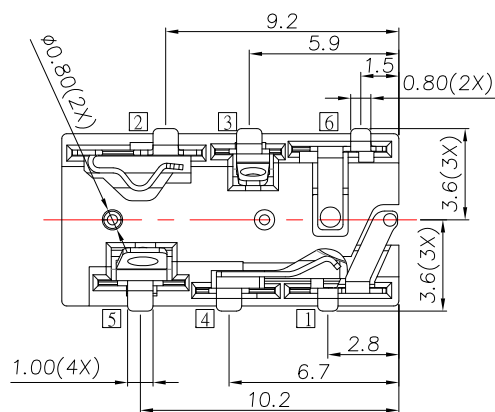

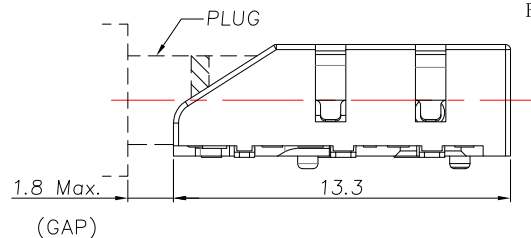

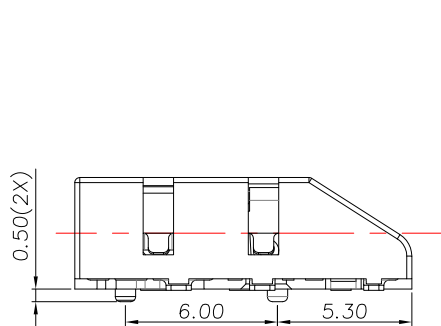


SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance: $\leq 50\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$
4. Withstand voltage: 500VAC
5. Insertion and extraction force: 3-30N
6. life test: 5,000 cycles

⑦	Terminal 6	⑥	1	Phosphor Bronze	Gold flash on contact area, gold flash plated on solder tail Area, all over nickel plated
⑥	Terminal 5	⑤	1	Phosphor Bronze	
⑤	Terminal 4	④	1	Phosphor Bronze	
④	Terminal 3	③	1	Phosphor Bronze	
③	Terminal 2	②	1	Phosphor Bronze	
②	Terminal 1	①	1	Phosphor Bronze	
①	Housing		1	PA10T	Black
NO.	DESCRIPTION	QTY	MATERIAL		REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/10/23
DATE: 07/10/23
DATE: 07/10/23

MATL
FINISH
SCALE
SHEET NO.

TITLE: JACK
MODLE: PHONE JACK
DWG NO.: PJ-5416D-S458
PART NO.: PJ-5416D-S458

SIZE: A4
VER: R