

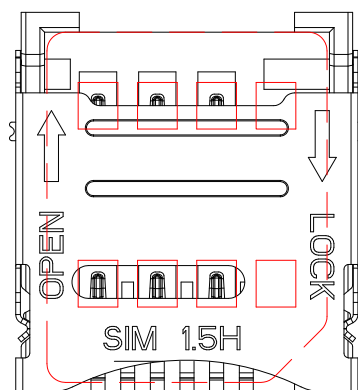
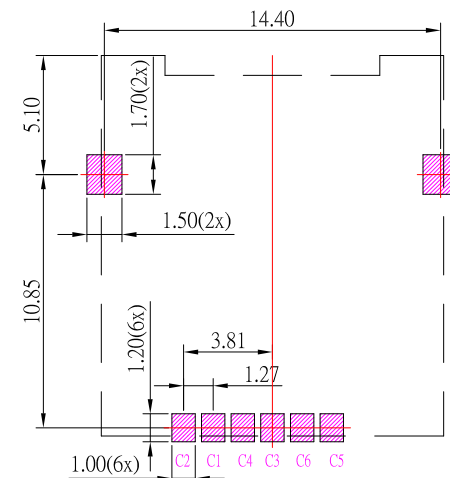
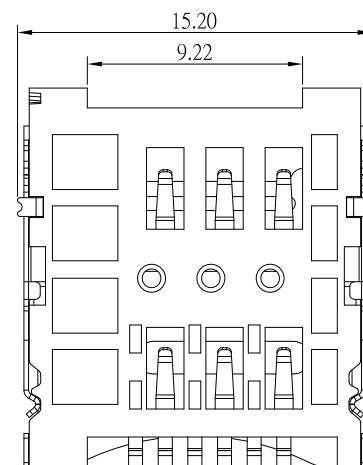
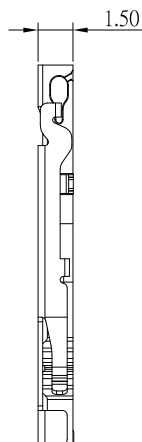


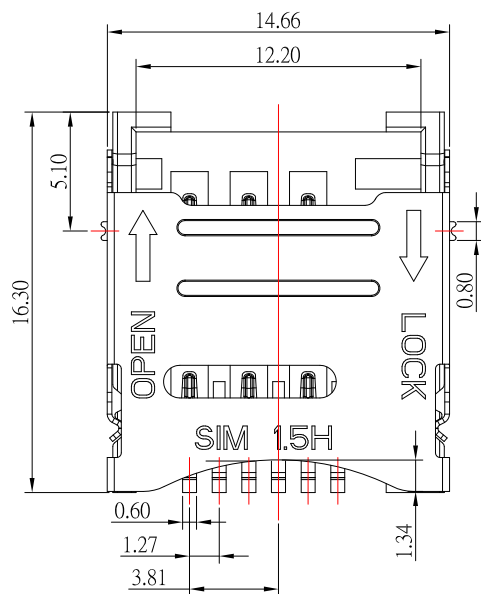

插卡示意圖

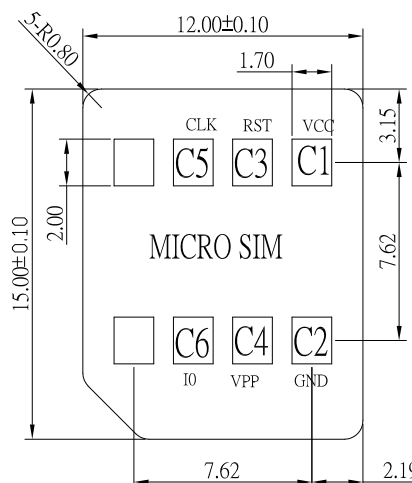

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I0

Electrical :

- 1.Rating: 1.0A
- 2.Contact Resistance: 50 mΩ Max.
- 3.Insulation Resistance: 1000 MΩ Min.
- 4.Dielectrec Withstanding Voltage: 250 V AC
- 5.Operating Temperature: -30℃ ~ +80℃.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	10/11/2

DATE
10/11/2

CHECKED BY:	DATE
Jacky Chen	10/11/2

DATE
10/11/2

APPROVED BY:	DATE:
Tony Kao	10/11/2

DATE
10/11/2

MAT'L

FINISH

SCALE
SHEET NO

TITLE	CONNECTOR
-------	-----------

MODLE	MICRO SIM 6PIN H1.5 掀蓋
-------	------------------------

DWG NO.	MSIM-06H150-S267
---------	------------------

PART NO. MSIM-06H150-S267

	SIZE
	A4
	VER
	D

ITEM NO.	DESCRIPTION	DRAWN	DATE
A	I	B	I