
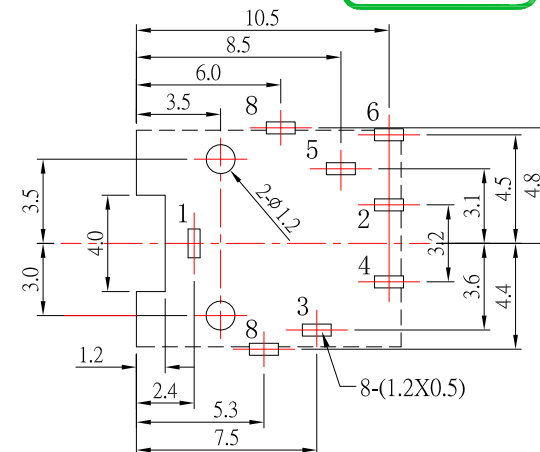
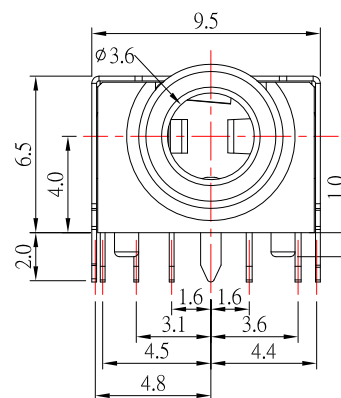
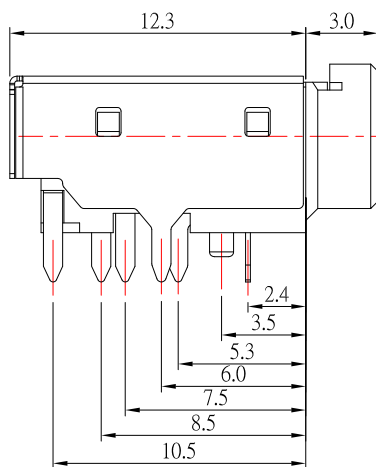
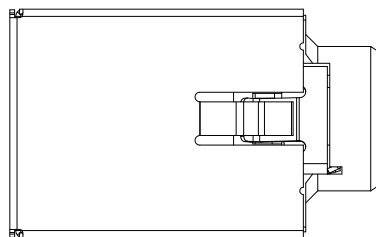


PJ-D30353FS-x-S457



Blank	Black
PI	Pink
GR	Green



P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- Rating : DC 30V, 0.5A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

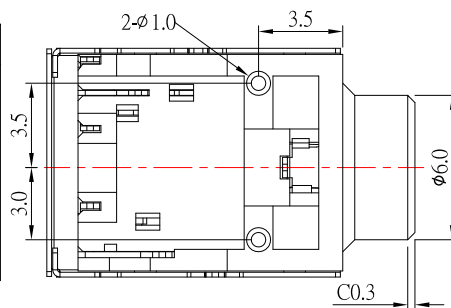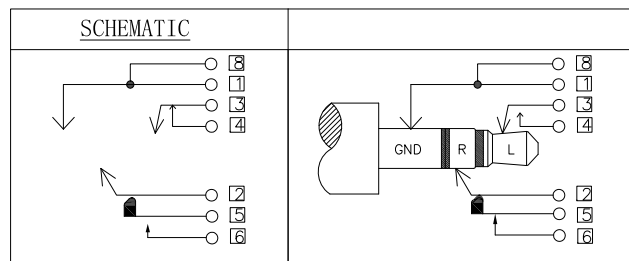

8	SHELL	1	SUS	Ni Plating
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn Plated over Ni
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
4	CURVE PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn Plated over Ni
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/19/23	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-D30353FS-x-S457
Jacky Chen	09/19/23	1 : 1	PART NO.	PJ-D30353FS-x-S457
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	09/19/23			

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------