


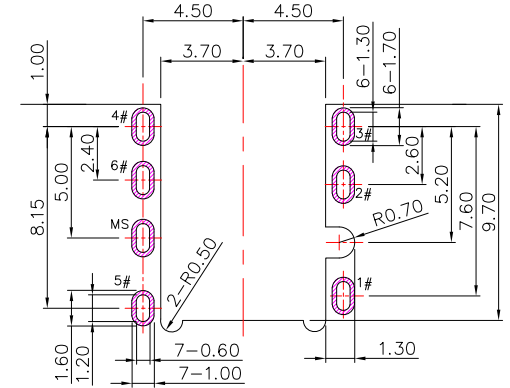
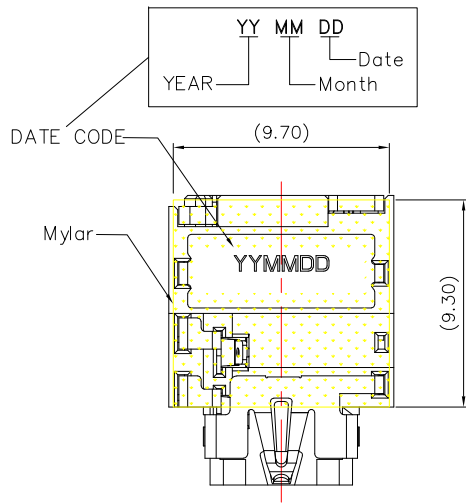
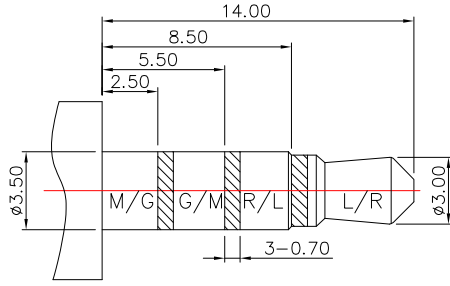
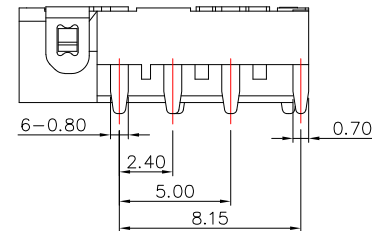



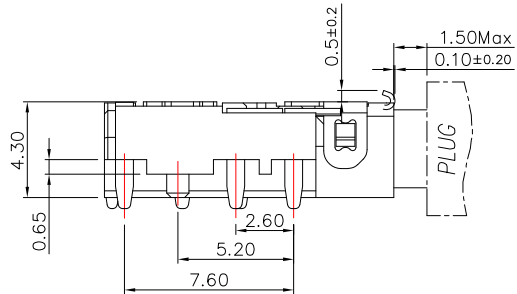

P.C.B LAYOUT



RECOMMENDED PLUG
ø3.5 4-POLE STANDARD PLUG

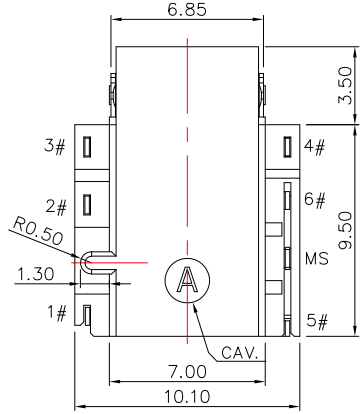

SPECIFICATION

- 1.Rating : DC 30V , 0.5A ;
- 2.Contact resistance : $\leq 50m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 2-30N;
- 6.life test : 5,000 cycles °

K	Mylar	1pcs		
J	Shell	MS 1pcs	SUS	Ni Plated
H	Separator	1pcs	PA10T	BLACK
G	Transfer	5 1pcs	Phosphor Bronze	Au on contact area Gold flash on solder area All over Ni min
F	MAKE terminal	6 1pcs	Phosphor Bronze	
E	TIP Spring	1 1pcs	Phosphor Bronze	
D	Ring B	2 1set	Phosphor Bronze	
C	Ring A	3 1set	Phosphor Bronze	
B	Earth	4 1pcs	Phosphor Bronze	
A	Housing	1pcs	PA10T	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

2	更新樣式	Jack	082924
1	更新樣式	Jack	052424
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/29/24	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-T52309B-S457
Jacky Chen	08/29/24	SHEET NO.	1 of 1	PART NO. PJ-T52309B-S457
APPROVED BY:	DATE			
Tony Kao	08/29/24			