

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30 VDC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

SUA-110V23Ax-x-S236

SHELL : _____


Color : _____

Blank : Brass

Black : B

I : SPCC

White : W

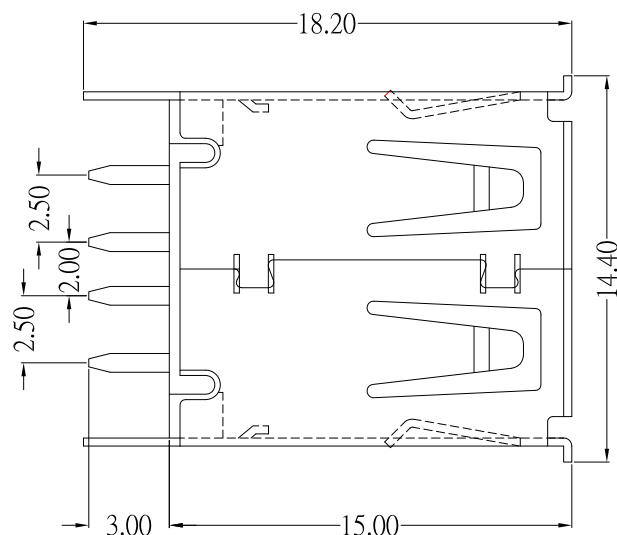

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/15/21
DATE: 12/15/21
DATE: 12/15/21

MATL	TITLE	CONNECTOR
FINISH	MODLE	USB AF 直立式 插板彎腳有捲邊 L15.0mm 腳距 2.10mm
SCALE	DWG NO.	SUA-110V23Ax-x-S236
SHEET NO.	PART NO.	SUA-110V23Ax-x-S236

SIZE: A4
VER: R1