


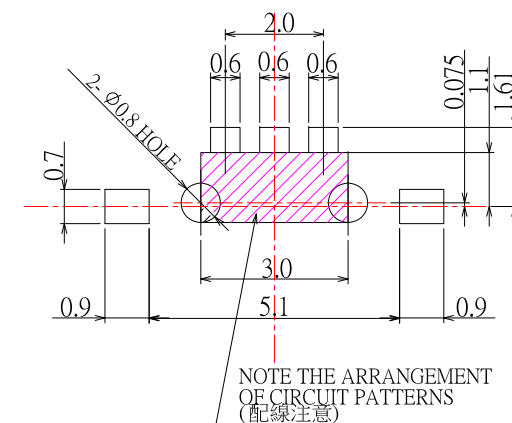
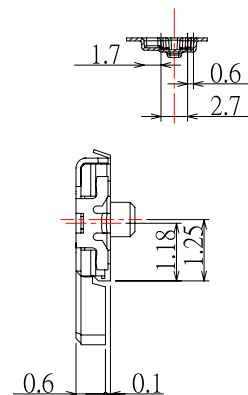
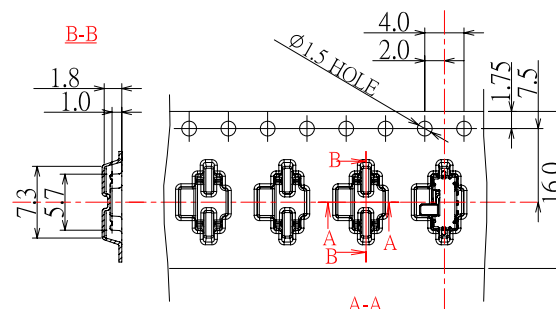


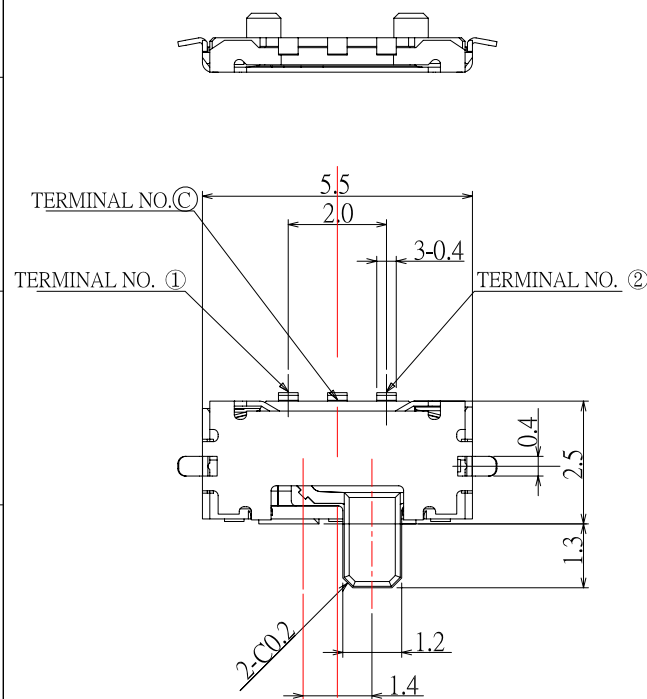

DIMNSIONS



P.C.B MOUNTING PATTERN

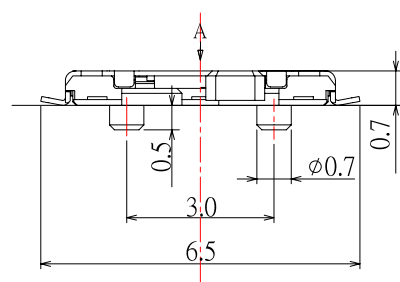

SCHEMATIC

SPECIFICATIONS

Rating	DC 5V 10mA
Function	1P-2T
Contact Resistance	300m Ω Max
Insulation Resistance	100M Ω Min
Operating Force	150gf $\pm$ 100gf
Operating Life (cycles)	10,000 Min.



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

05/07/19

CHECKED BY:

Jacky Chen

DATE

05/07/19

APPROVED BY:

Tony Kao

DATE

05/07/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

SLIDE SWITCH

SS-B20-S304

SS-B20-S304

SIZE

A4

VER

R