
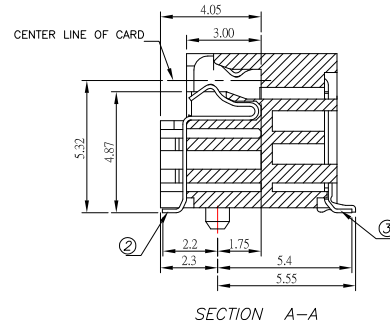
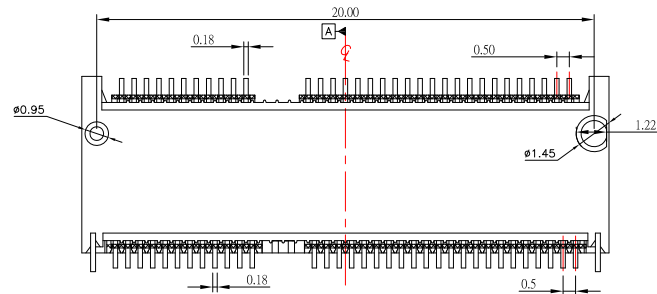
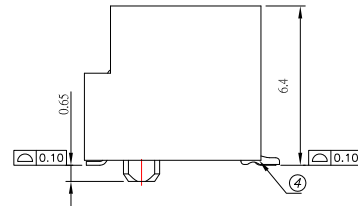
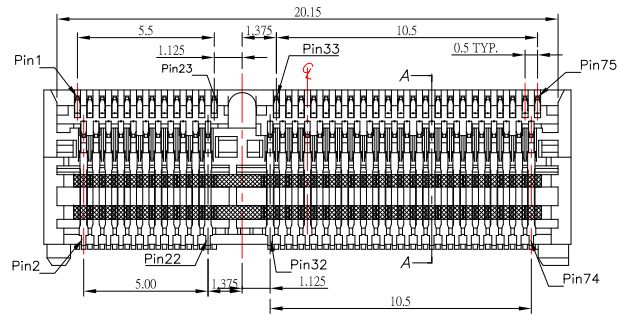
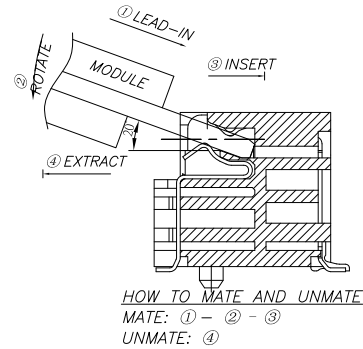


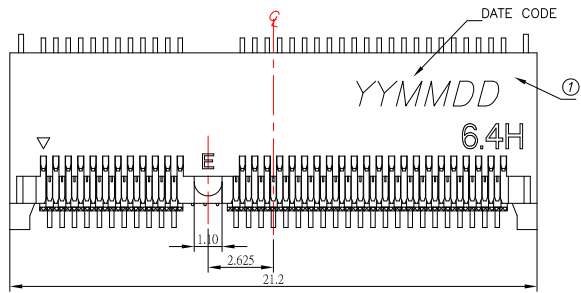

1.SPECIFICATION:

- 1.1 Current Rate: 0.5 A
- 1.2 Voltage Rate: 50V AC
- 1.3 Insulator Resistance: 500 MΩ Min
- 1.4 Dielectric Strength: 300V AC
- 1.5 Contact Resistance: 55mΩ Max
- 1.6 Mating Force: 20N Max
- 1.7 Unmating Force: 20N Max

2.MATERIAL:

- 2.1 Housing: LCP,UL94V-0
- 2.2 Contact: Phosphor Bronze
- 2.3 Leg: Brass

3.Finish:

- 3.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 3.2 Leg: Tin Plated on Solder Balls
Nickel under plated overall

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM


DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/25/16
DATE: 11/25/16
DATE: 11/25/16


MAT'L	TITLE	CONNECTOR
FINISH	MODLE	NGFF SOCKET(M.2 CONNECTOR) H:6.4 STD E KEY DUAL-SMT TYPE
SCALE	DWG NO.	NGF-64SE-S273
SHEET NO.	PART NO.	NGF-64SE-S273

SIZE	A4
VER	R

ITEM NO.	DESCRIPTION	DRAWN	DATE

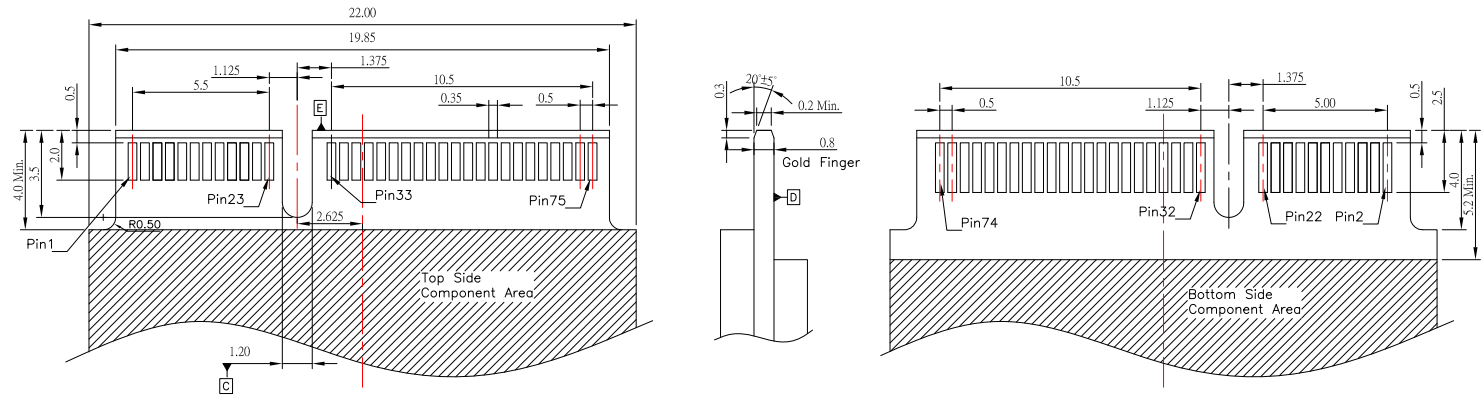

Recommended Mould Finger Layout

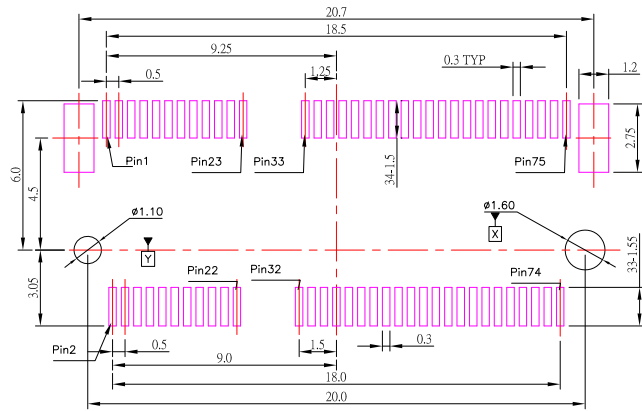

Recommended PCB Layout(Top View)

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/25/16			
CHECKED BY:	DATE	FINISH	MODLE	NGFF SOCKET(M.2 CONNECTOR) H:6.4 STD E KEY DUAL-SMT TYPE
Jacky Chen	11/25/16			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	11/25/16	1 : 1	NGF-64SE-S273	A4
		SHEET NO.	PART NO.	VER
		2 of 2	NGF-64SE-S273	R