

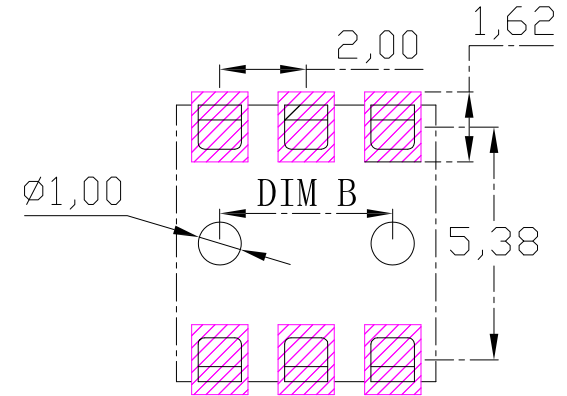
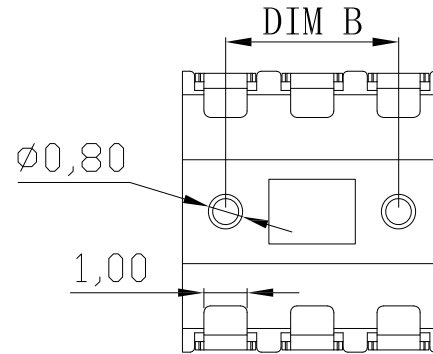
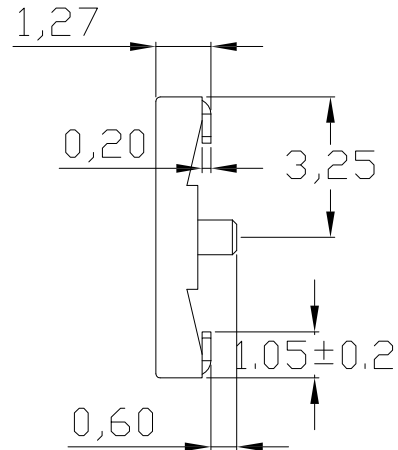


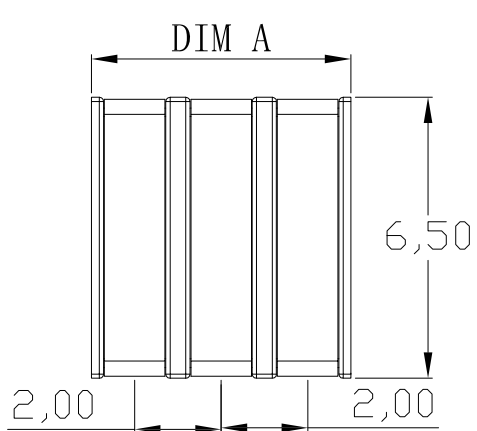

P.C.B LAYOUT

BC-20013F-G_{xx}-S410

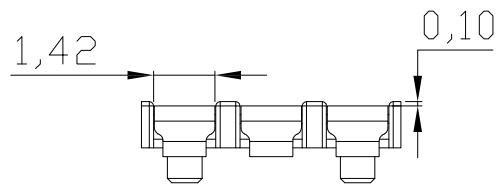

Pin 数	DIM A	DIM B
2P	4.0	2.0
3P	6.0	4.0
4P	8.0	6.0
5P	10.0	8.0
6P	12.0	10.0
7P	14.0	12.0
8P	16.0	14.0

MATERIAL:

- 1.Housing: PA9T,Black
- 2.Contact: Brass,Gold Plated

ELECTRICAL:

- 1.Rating: 30V , 5.0A
- 2.Contact Resistance: 30mΩ Max
- 3.Insulator Resistance: 500 MΩ Min
- 4.Withstanding Voltage: 500V AC
- 5.Operating Temperature: -55℃ ~ 125℃

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/17/24
DATE: 10/17/24
DATE: 10/17/24

MAT'L		TITLE	CONNECTOR
FINISH		MODE	BATTERY CONNECTOR
SCALE	1 : 1	DWG NO.	BC-20013F-G _{xx} -S410
SHEET NO.	1 of 1	PART NO.	BC-20013F-G _{xx} -S410

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------