



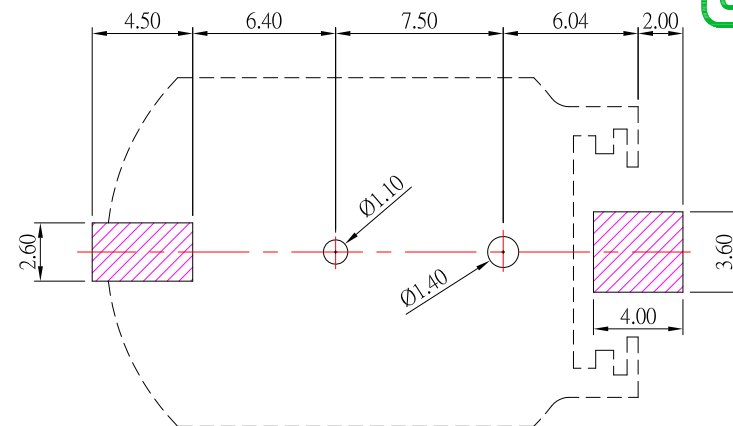

SPECIFICATION

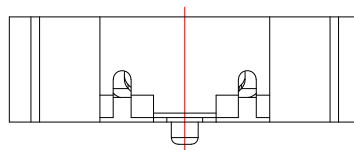

1. Contact resistance: $\leq 30\text{m}\Omega$;
2. Insulation resistance: $\geq 100\text{M}\Omega$ (DC500V);
3. Withstand voltage: 500VAC.

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	10/17/24					
CHECKED BY:	DATE	FINISH		MODLE	2032 電池座	
Jacky Chen	10/17/24					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	BC-203203-S124	SIZE
Tony Kao	10/17/24	SHEET NO.	1 of 1	PART NO.	BC-203203-S124	A4
						VER
						R4

4	更新材質	Jack	101824
3	更新樣式	Jack	112222
2	更新圖面	Jack	070522
1	更新圖面	Jack	070122
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle $\pm 0.3^\circ$	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	-----------------	--	-------	----