

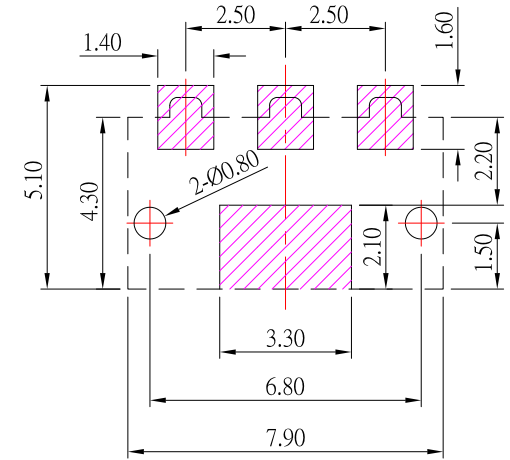
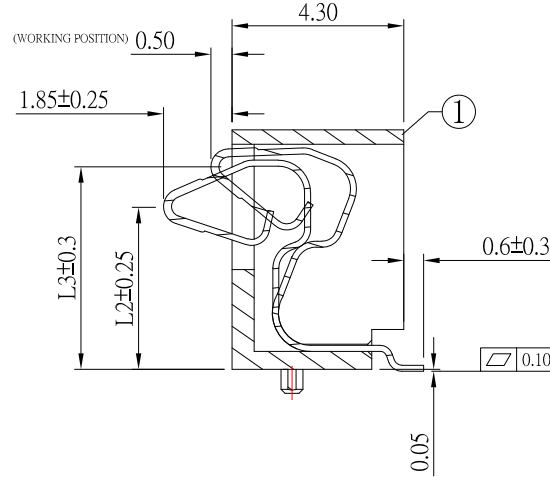


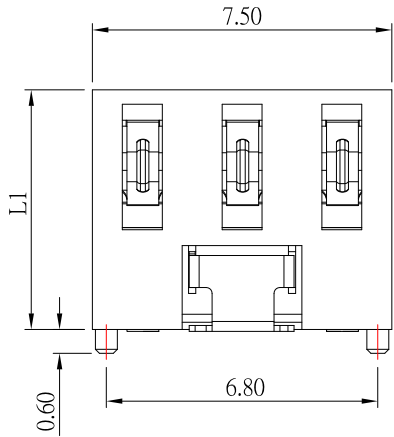

P.C.B LAYOUT TOP VIEW

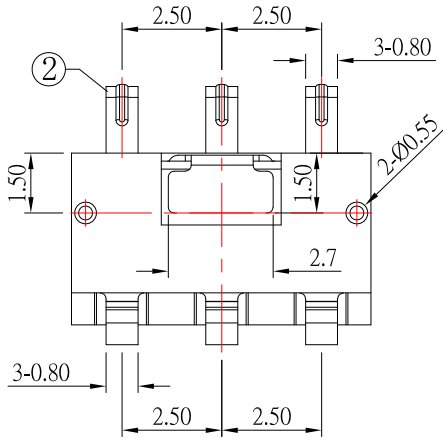

BC-S250x-03P-S124

PART NO.	L1	L2	L3
A	5.4	3.8	4.6
B	6.0	4.4	5.2
C	6.5	4.9	5.7
D	7.0	5.4	6.2
E	7.5	5.9	6.7
F	8.0	6.4	7.2

NOTES:

- 1, Rated current: 2.0A
- 2, Rated voltage: 12V
- 3, Contact Resistance: 50mΩ MAX
- 4, Insulation Resistance: 100MΩ MIN 100V DC
- 5, Dielectric withstanding voltage: 100V AC.
- 6, Durability: 5000 Cycles Min.
- 7, Operating condition: Temperature: -40°C ~ +85°C;

2	SPRING	3	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	05/17/24			
CHECKED BY:	DATE	FINISH	MODE	BATTERY CONNECTOR
Jacky Chen	05/17/24			
APPROVED BY:	DATE	SCALE	DWG NO.	BC-S250x-03P-S124
Tony Kao	05/17/24	1 : 1		
SHEET NO.	1 of 1	PART NO.	BC-S250x-03P-S124	SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------