





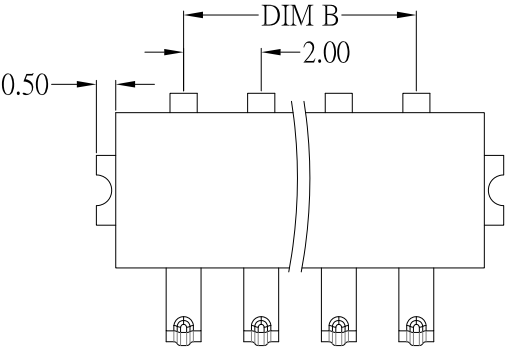


BC-W8801F-xx-S410

PART NO.	DIM A	DIM B	DIM C
03	7.50	4.0	2.0
04	9.50	6.0	4.0
05	11.5	8.0	6.0
06	13.5	10.0	8.0

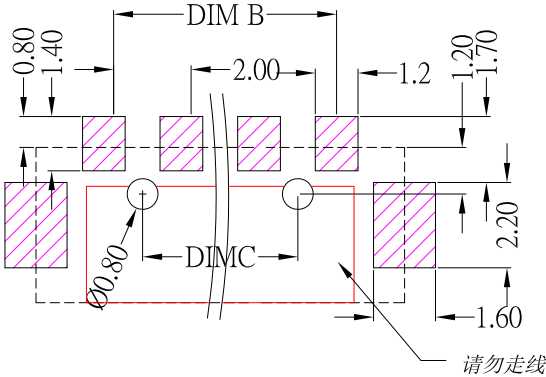

P.C.B LAYOUT

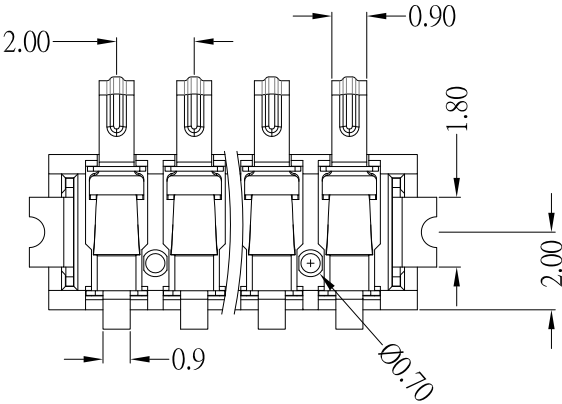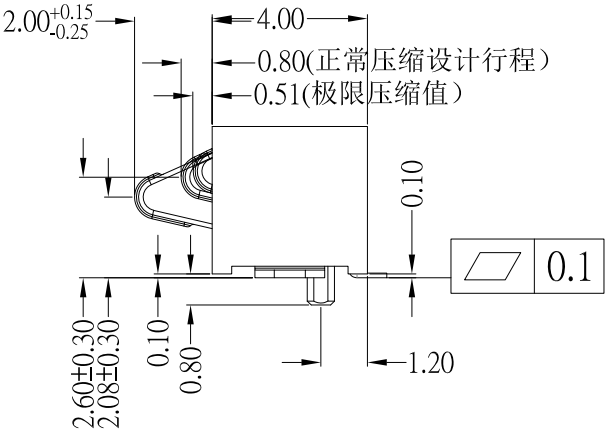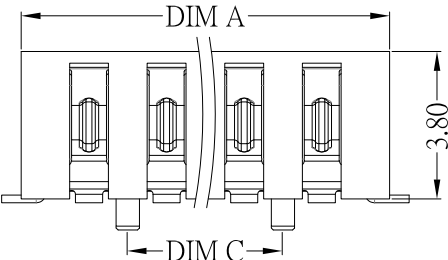

MATERIAL:

- 1.Housing: LCP,Black
- 2.Contact: Phosphor Bronze,Gold Plated

ELECTRICAL:

- 1.Rating: 12V , 2.0A
- 2.Contact Resistance: 30mΩ Max
- 3.Insulator Resistance: 500 MΩ Min
- 4.Withstanding Voltage: 500V AC
- 5.Operating Temperature: -40℃ ~ 85℃

				DRAWN BY:			DATE	MAT'L		TITLE	CONNECTOR
				Jack Lu			04/08/25				
				CHECKED BY:			DATE	FINISH		MODE	BATTERY CONNECTOR
				Jacky Chen			04/08/25				
				APPROVED BY:			DATE	SCALE	1 : 1	DWG NO.	BC-W8801F-xx-S410
				Tony Kao			04/08/25				
				SHEET NO.			1 of 1	PART NO.	BC-W8801F-xx-S410		SIZE
								VER			R

ITEM NO.

DESCRIPTION

DRAWN

DATE

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5
Above 5 ~ 15
Above 15 ~ 30
Above 30 ~ 50
Angle

±0.2
±0.3
±0.4
±0.5
±0.3

3RD.
ANGEL'S

UNITS

MM

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.