


P.C.B LAYOUT

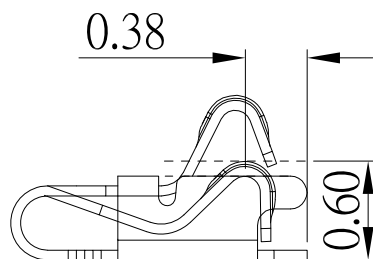

STATE AT WORKING
HEIGHT 0.6MM

PRODUCT NO.

1. SPECIFICATIONS:

- 1.1. CONTACT RESISTANCE: 80 mΩ MAX
- 1.2. VOLTAGE RATING: 1.5V/AC/DC/MAX
- 1.3. CURRENT RATING: 1.0A/MAX
- 1.4. PRE-LOAD FORCE: 0.5±0.1N ON CONTACT POINT
- 1.5. MAX.BEAM DEFLECTION: 0.7±0.1N ON CONTACT POINT
- 1.6. DURABILITY: 2000 CYCLES
- 1.7. OPERATING TEMPERATURE: -20°C~80°C

2. MATERIAL:

- 2.1. STAINLESS STEEL

3. FINISH:

- 3.1 NICKEL UNDERPLATING OVERALL

ITEM NO.	DESCRIPTION	DRAWN	DATE

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	05/29/25			
CHECKED BY:	DATE	FINISH	MODLE	Antenna Spring Terminal SMT TYPE H:1.0mm
Jacky Chen	05/29/25			
APPROVED BY:	DATE	SCALE	DWG NO.	AST-04-S486
Tony Kao	05/29/25	1 : 1		
		SHEET NO.	PART NO.	AST-04-S486
		1 of 1		

SIZE	A4
VER	R