


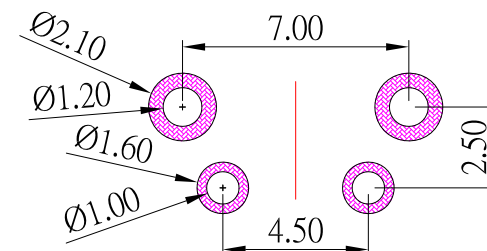


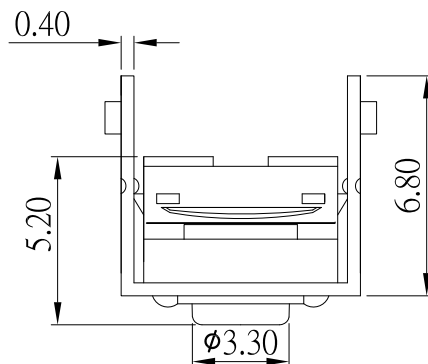

CIRCUIT DIAGRAM

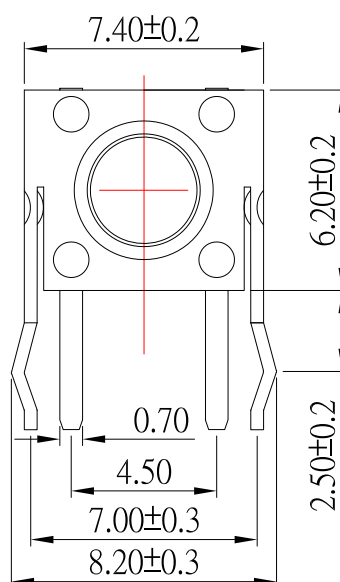

P.C.B LAYOUT

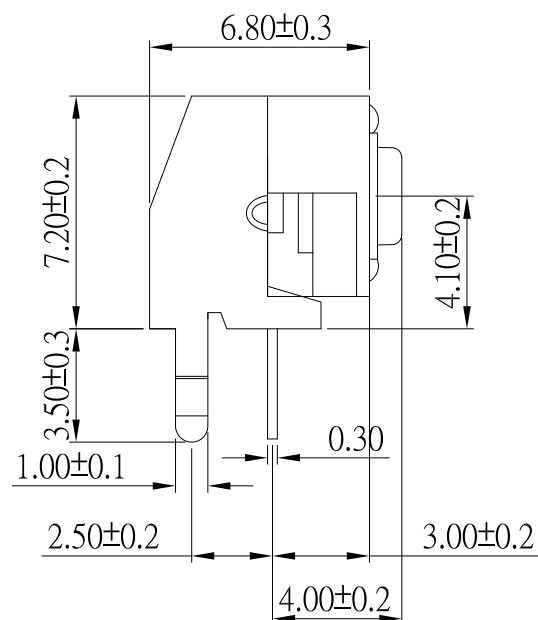

SPECIFICATIONS

Rating	0.05A , 12V DC
Contact Resistance	100mΩ Max.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Travele	0.40±0.15mm
Operating Force	280 ± 70gf
Operating Life	50,000

H	PLASTIC COVER	1	PPA(Black)	
G	WATERPROOFBOARD	1	SILICONE(Black)	
F	DUST-PROOF FILM	1	PI(Yellow)	
E	METAL COVER	1	BRASS	Ni plated
D	STEM	1	PPA(Black)	
C	CONTACT	1	SUS	Ag plated
B	THERMINAL	2	BRASS	Ag plated
A	BASE	1	PPA(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: DATE		MAT'L		TITLE	SWITCH		
					Jack Lu	04/22/25		FINISH		MODLE	TACT SWITCH 6X6 ,90度帶支架防水開關	
					CHECKED BY: DATE	Jacky Chen	04/22/25		SCALE	1 : 1	DWG NO.	TS-A20WV2-3-S246
ITEM NO.	DESCRIPTION	DRAWN	DATE			APPROVED BY: DATE	Tony Kao	04/22/25	SHEET NO.	1 of 1	PART NO.	TS-A20WV2-3-S246