
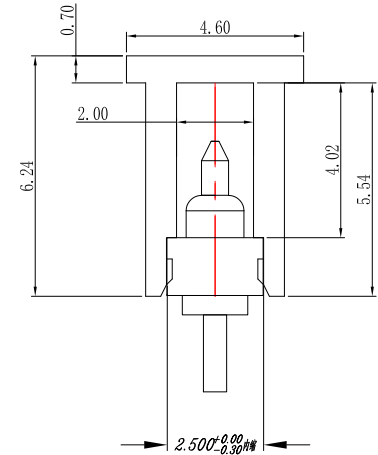
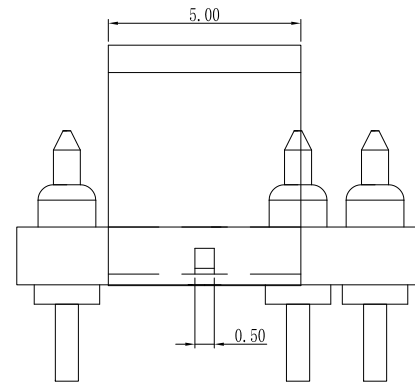
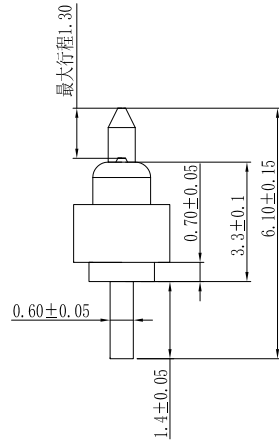


Recommend PCB Layout
Layout Tolerance±0.05

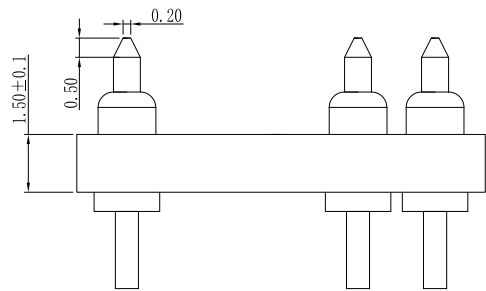

CAP 裝配圖

Notes:

- Material:
 - a.Plunger: C3604
 - b.Barrel: C3604
 - c.Spring: SUS
- Surface treatment (plating):
 - a.plunger:3micro inch Au over 50~100 micro inch nickel ;
 - b.barrel:3micro inch Au over 50~100 micro inch nickel
- Durability: 10000 cycles min;
- Spring force: Stroke 1.1mm 50gf±15gf at normal working height.
- Electrical
 - Rated current & voltage: DC 12V; 1.0A Max.
 - Contact resistance: 50 mohm maximum at normal working height(quiessence)

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Above 50 ~ 100 ± 0.3 Apple 3RD. ANGEL'S  UNITS MM						DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR	
										Jack Lu	08/14/25					
										CHECKED BY: DATE		FINISH		MODLE	POGO PIN	
										Jacky Chen	08/14/25					
3	更新尺寸	Jack	081425			SCALE	1 : 1	DWG NO.	PGC-066507-3P-S410		SIZE					
2	新增CAP图示	Jack	070925			A4										
1	更新尺寸和SPEC	Jack	070825			VER										
ITEM NO.	DESCRIPTION	DRAWN	DATE			Tony Kao	08/14/25	SHEET NO.	1 of 1	PART NO.	PGC-066507-3P-S410	R3				