
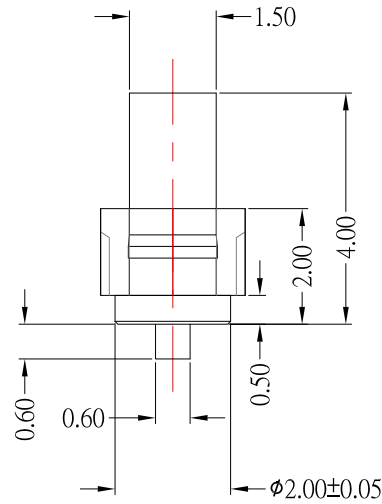
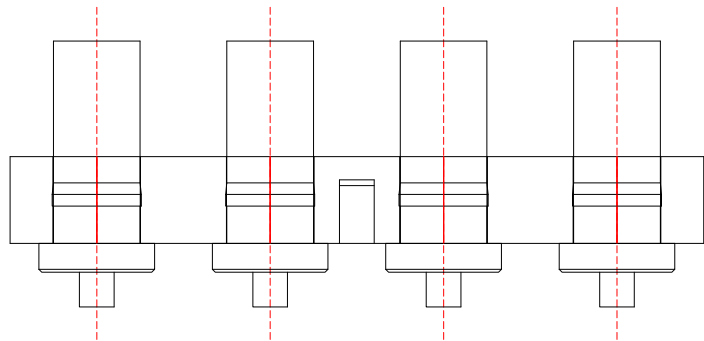


Recommend PCB Layout

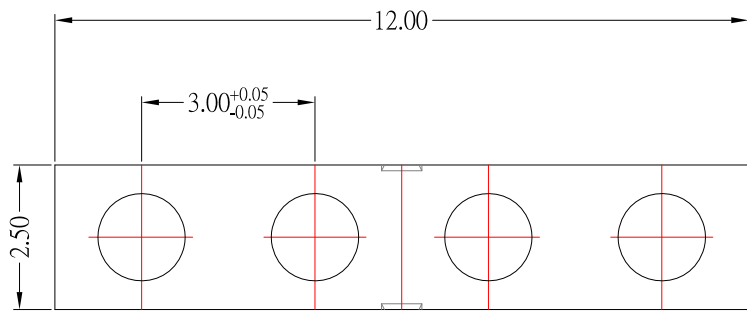

NOTE

- 1.Material
Plunger: Brass
Housing: PA9T
- 2.Plating
Plunger: Au over Ni
- 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
- 4.Mechanical
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operate it based on the working height
Based on the engineering drawings,shall not exceed the maximum allowed compression
- 6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5	±0.2
		Above 5 ~ 15	±0.3
		Above 15 ~ 30	±0.4
		Above 30 ~ 50	±0.5
		Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	08/30/22	FINISH		MODLE	POGO PIN
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	PGC-204006-4P-S353
Jacky Chen	08/30/22	SHEET NO.	1 of 1	PART NO.	PGC-204006-4P-S353
APPROVED BY:	DATE				
Tony Kao	08/30/22				

1	新增尺寸	Jack	083022
ITEM NO.	DESCRIPTION	DRAWN	DATE