
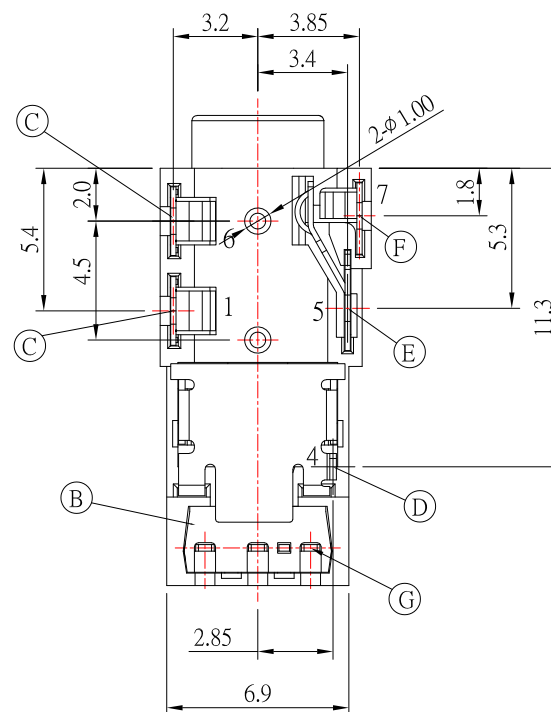
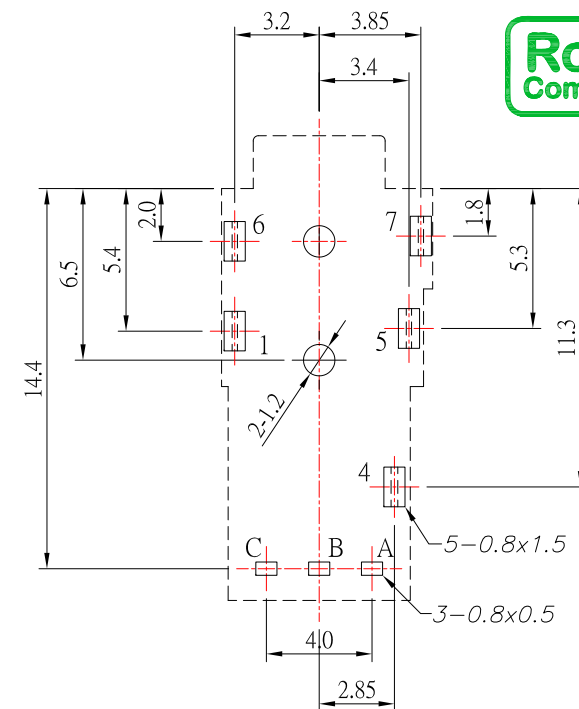



OJ-004A-RX_{xx}-S214

16	16 Mbps
25	25 Mbps



PCB LAYOUT
BOTTOM VIEW

SPECIFICATIONS:

- 1.CONTACT RESISTANCE: 50mΩ MAX
- 2.INSULATION RESISTANCE: 100MΩ MIN
- 3.OPERATING TEMPERATURE RANGE: -25°C TO +85°C.
4. INSERTION FORCE: 3.5kg(Max).
5. EXTRACTION FORCE: 0.4~4.0kg.

Ⓒ	DRIVE IC(TX)			1
Ⓓ	M7	PHOSPHOR BRONZE	Au	1
Ⓔ	M5	PHOSPHOR BRONZE	Au	1
Ⓚ	M4	PHOSPHOR BRONZE	Au	1
Ⓚ	M1&M6	PHOSPHOR BRONZE	Au	2
Ⓔ	COVER	PA10T	BLACK	1
Ⓐ	HOUSING	PA10T	BLACK	1
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY

				 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.		DRAWN BY: DATE		TITLE		JACK	
						Jack Lu 09/16/25		FINISH		MODLE OPTICAL JACK(接收端)	
						CHECKED BY: DATE		SCALE		1 : 1	
						Jacky Chen 09/16/25		DWG NO.		OJ-004A-RXxx-S214	
				TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3		3RD. ANGEL'S		 UNITS MM	
ITEM NO.	DESCRIPTION	DRAWN	DATE			APPROVED BY: DATE		SHEET NO.		1 of 1	
						Tony Kao 09/16/25		PART NO.		OJ-004A-RXxx-S214	
										VER R	