





IP67

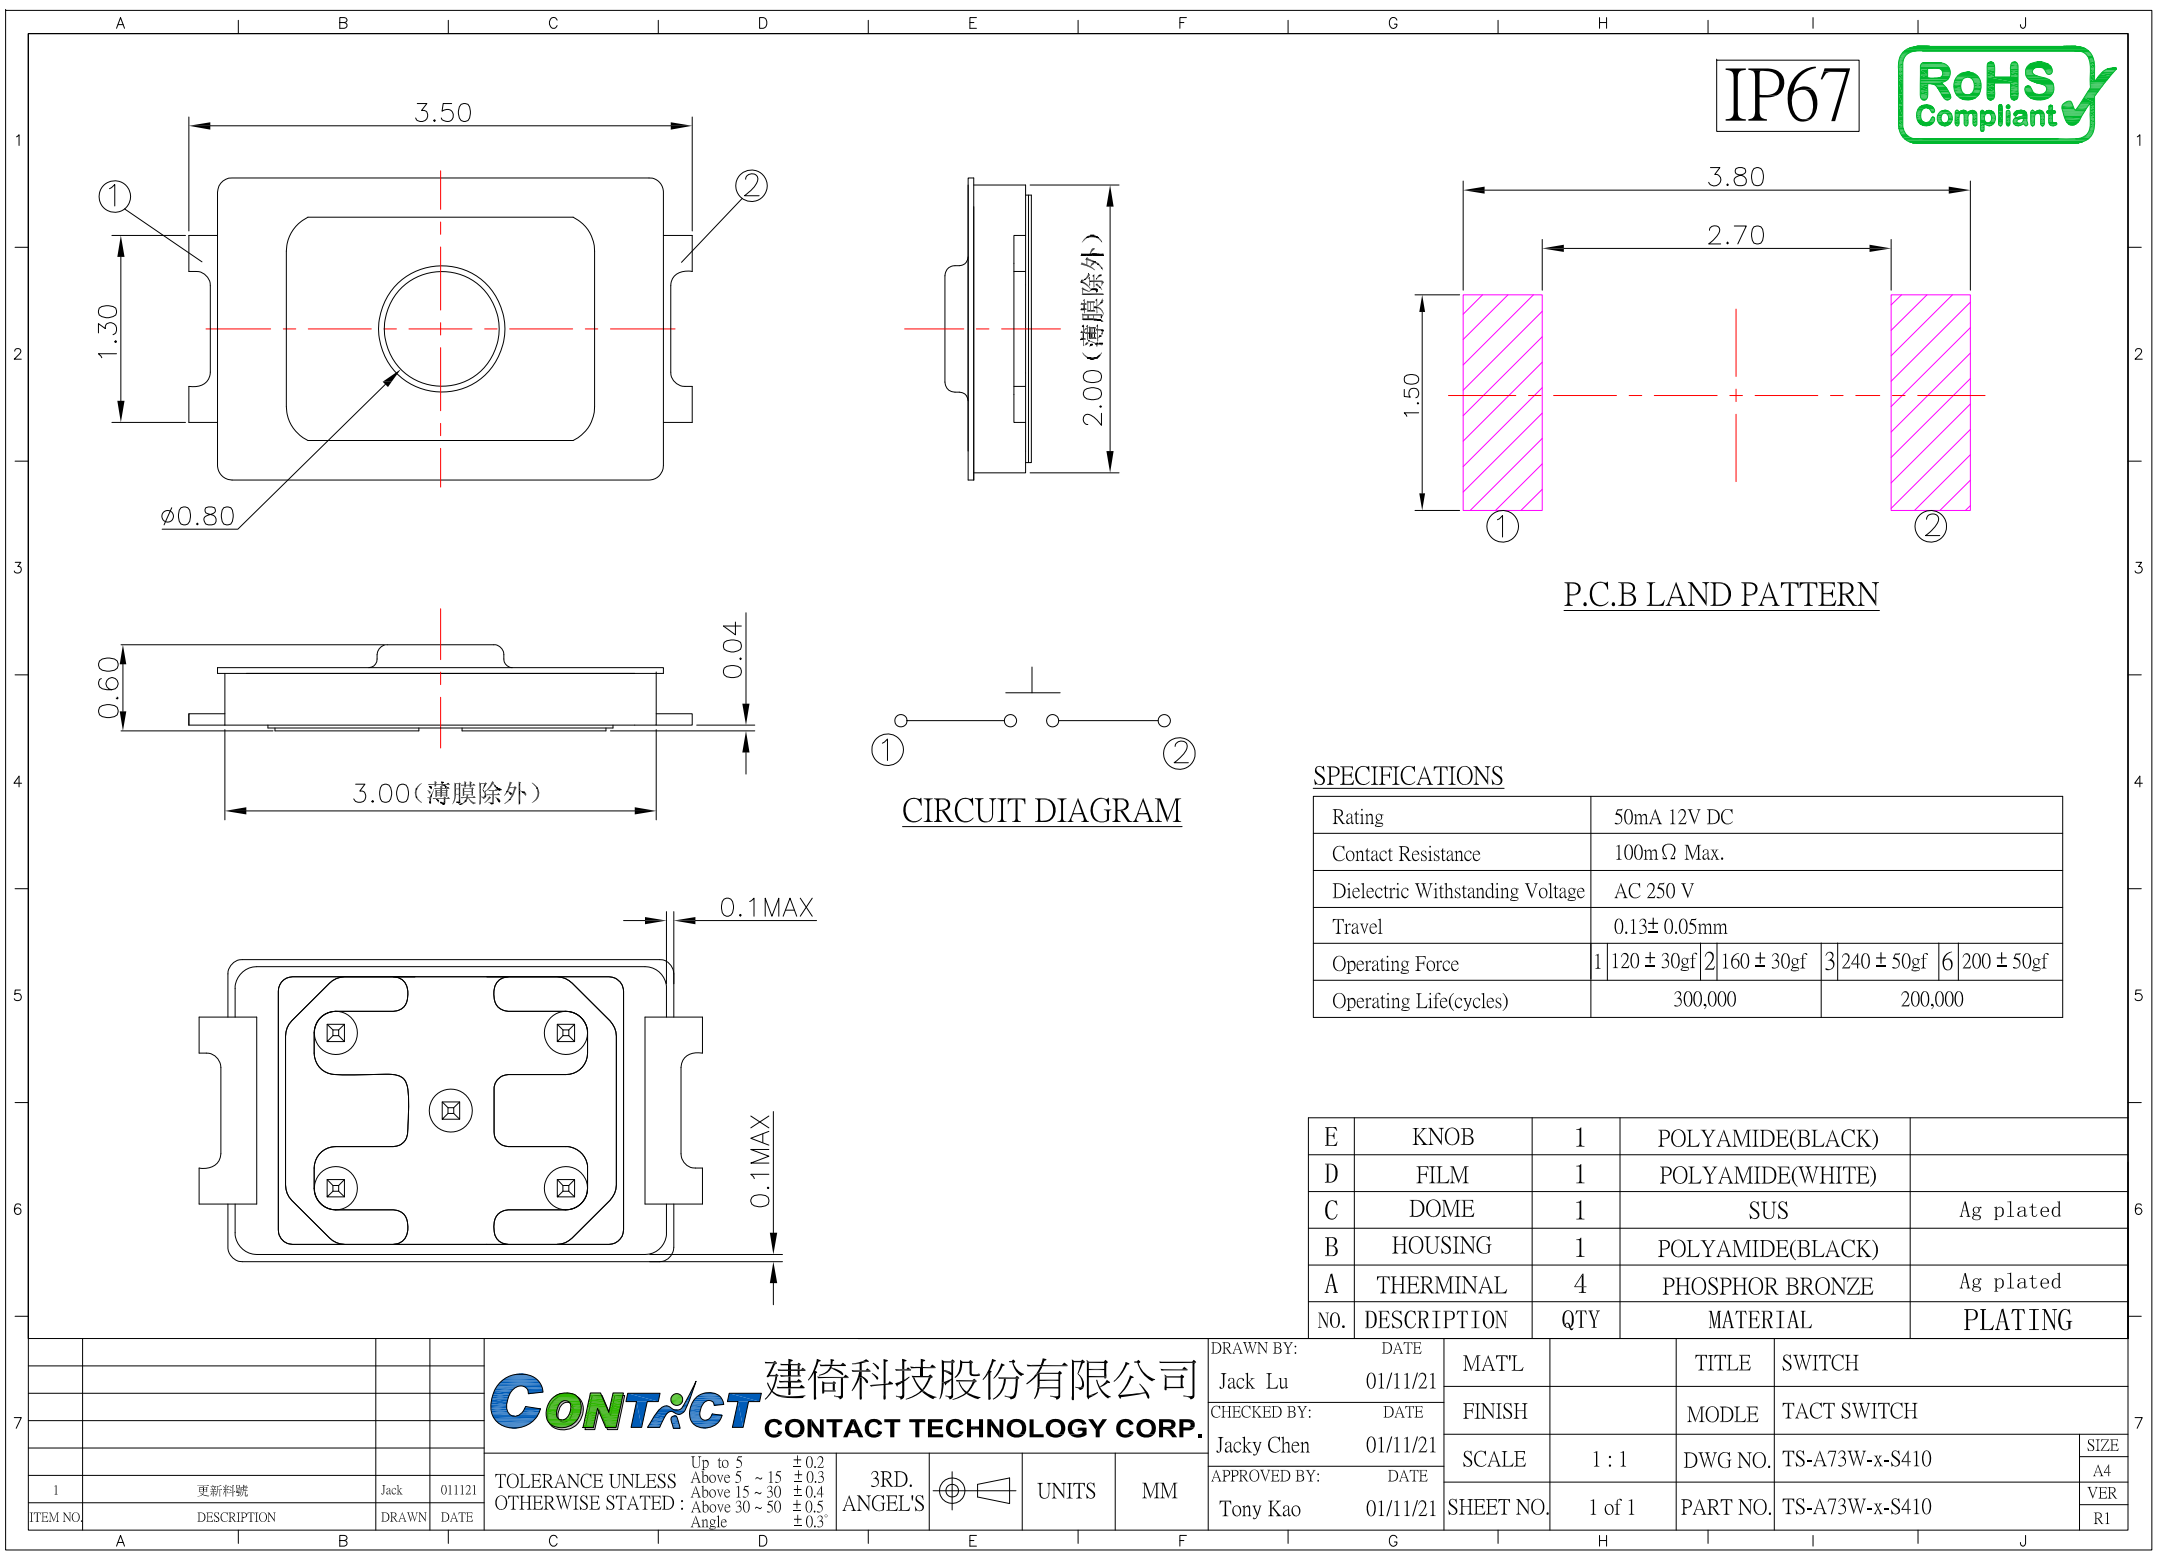

P.C.B LAND PATTERN



SPECIFICATIONS

Rating	50mA 12V DC			
Contact Resistance	100mΩ Max.			
Dielectric Withstanding Voltage	AC 250 V			
Travel	0.13± 0.05mm			
Operating Force	1 120 ± 30gf	2 160 ± 30gf	3 240 ± 50gf	6 200 ± 50gf
Operating Life(cycles)	300,000		200,000	

E	KNOB	1	POLYAMIDE(BLACK)	
D	FILM	1	POLYAMIDE(WHITE)	
C	DOME	1	SUS	Ag plated
B	HOUSING	1	POLYAMIDE(BLACK)	
A	THERMINAL	4	PHOSPHOR BRONZE	Ag plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				CONTACT 建倚科技股份有限公司			
				CONTACT TECHNOLOGY CORP.			
				TOLERANCE UNLESS OTHERWISE STATED :			
				Up to 5 ±0.2			
				Above 5 ~ 15 ±0.3			
				Above 15 ~ 30 ±0.4			
				Above 30 ~ 50 ±0.5			
				Angle ±0.3°			
				3RD. ANGEL'S			
				UNITS			
				MM			
1	更新料號	Jack	011121				
ITEM NO.	DESCRIPTION	DRAWN	DATE				

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	01/11/21			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	01/11/21			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A73W-x-S410
Tony Kao	01/11/21	1 : 1		
		SHEET NO.	PART NO.	TS-A73W-x-S410
		1 of 1		

SIZE
A4
VER
R1