

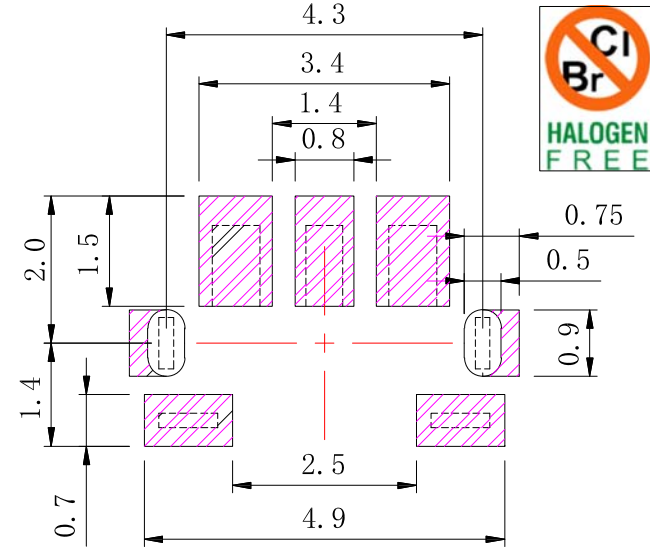
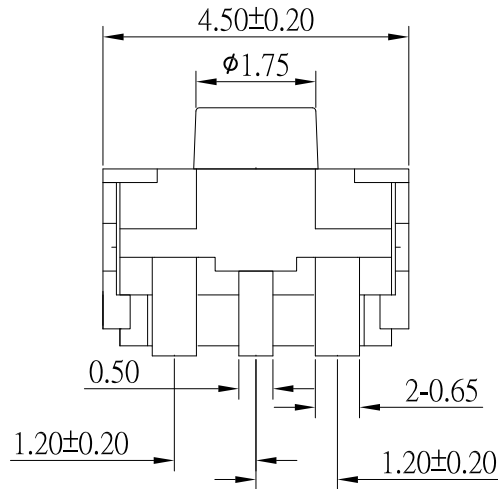
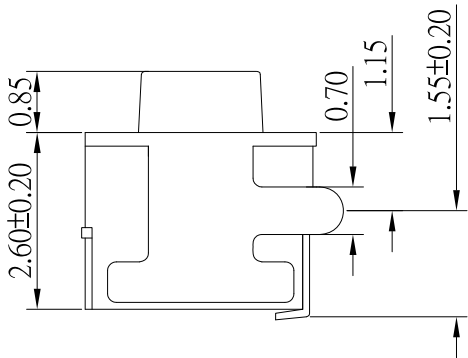


TS-AA2-xx-HF-S246

XX	Operating Force	STEM COLOR
2	160 ± 50gf	Black
3R	260 ± 50gf	RED

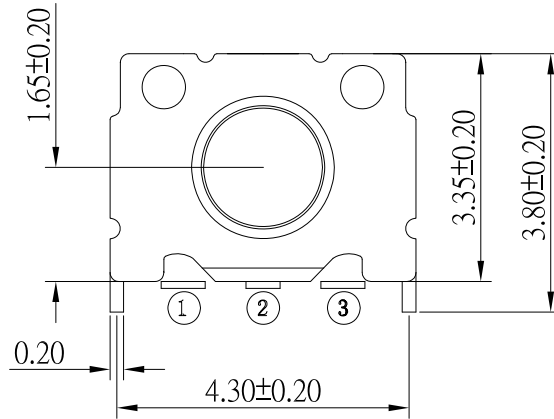

PCB LAYOUT



SPECIFICATIONS

Rating	DC 12V 50mA.			
Insulation Resistance	100 MΩ Min.			
Contact Resistance	100 mΩ Max.			
Operating Force	2	160 ± 50gf	3	260 ± 50gf
Operating Life (cycles)	100,000			

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	LCP	Black
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

12	更新選項編號	Jack	062624
11	更新PCB LAYOUT	Jack	121420
10	更新圖面	Jack	060320
9	更新料號新增UL94V-0	Jack	051820
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/26/24			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH 無鹵/防火等級94V-0
Jacky Chen	06/26/24			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-AA2-xx-HF-S246
Tony Kao	06/26/24	1 : 1		
SHEET NO.	1 of 1	PART NO.	TS-AA2-xx-HF-S246	
				SIZE A4
				VER R12