
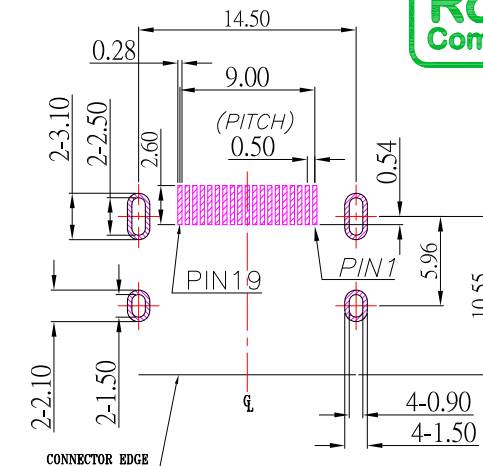
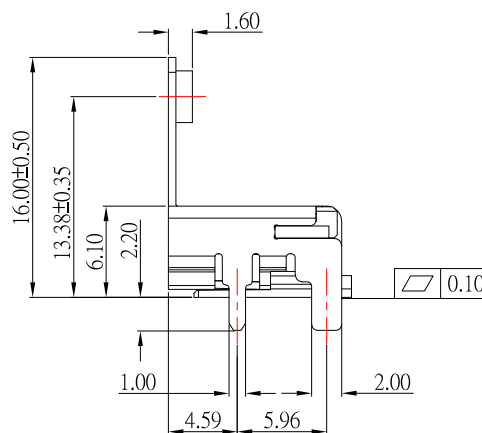

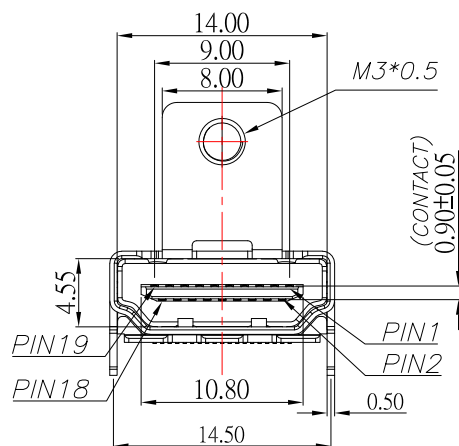


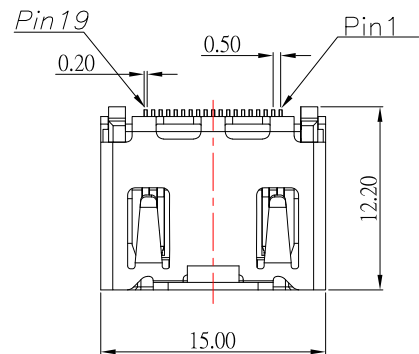

RECOMMENDED PCB LAYOUT (TOP VIEW)

NOTE:

1.MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: BRASS

1.3 SHEEL: BRASS

2.PLATING :

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.ELECTRICAL:

3.1 RATING: 40V , 0.5A

3.2 INSULATION RESISTANCE: 100MΩ MIN

3.3 CONTACT RESISTANCE: 30 mΩ MAX

3.4 WITHSTANDING VOLTAGE: 500V AC / MINUTE

3.5 OPERATING TEMPERATURE: -25°C~ 85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/28/25
DATE: 07/28/25
DATE: 07/28/25

MAT'L	FINISH	SCALE	SHEET NO.	TITLE	MODLE	DWG NO.	PART NO.	SIZE
		1 : 1	1 of 1	CONNECTOR	HDMI AF 刺破式 螺孔H13.38mm 四直腳四彈片	HDMI-19P-SND26-S297	HDMI-19P-SND26-S297	A4
								VER
								R