



SBC-140P2A-20x-S412

鍍層厚度：


Blank : 1u"

2 : 15u"

3 : 30u"

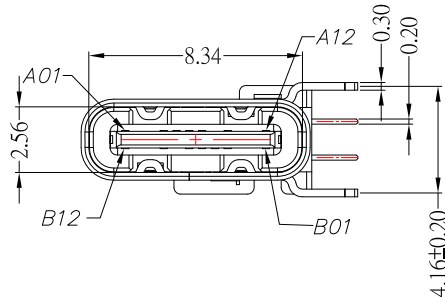

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	D-
A6	D+	B6	D+
A7	D-	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

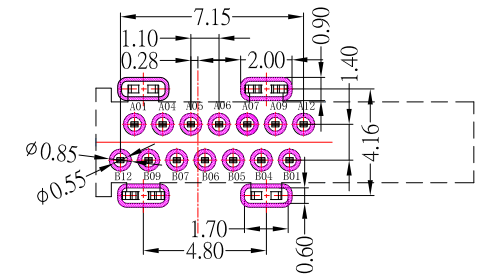

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Electrical:

- Rating: 5.0 A
- Dielectric Withstand Voltage: 150V AC
- Contact Resistance: 40 mΩ Max
- Insulation Resistance: 100 MΩ Min

Mechanical:


- Connector Mate and Unmate Force
 - Mate force: 5~20 N
 - Unmate force: 8~20 N

Material:




- Housing: LCP
- Contact: BRASS
- Shell: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- Shell: Nickel under Plated surface layer

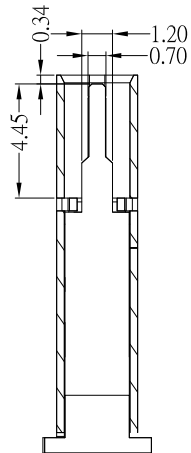

剖視圖

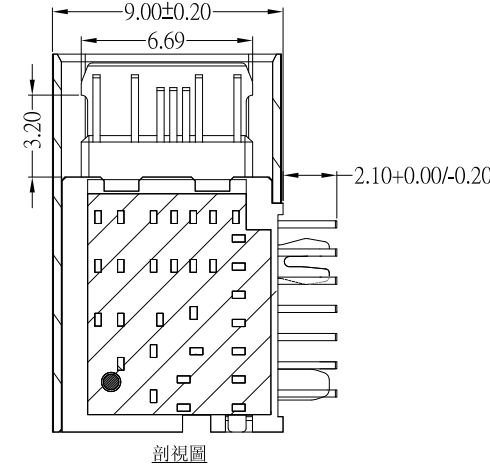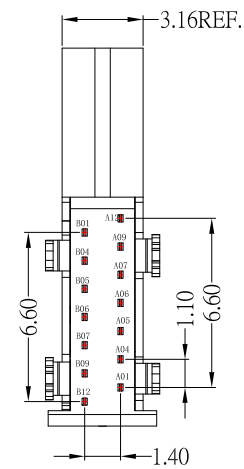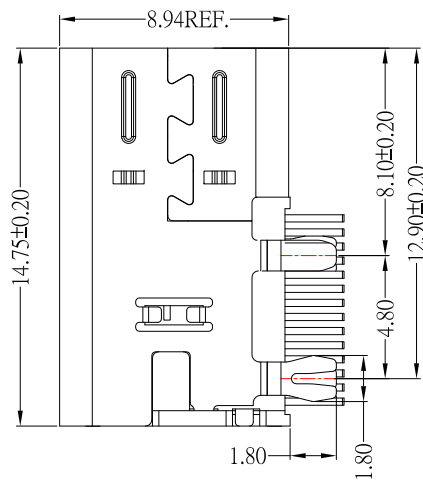

剖視圖

CONTACT建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°3RD.
ANGEL'S

UNITS

MM

DRAWN BY: DATE

Jack Lu 07/20/23

CHECKED BY: DATE

Jacky Chen 07/20/23

APPROVED BY: DATE

Tony Kao 07/20/23

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB 3.1 側插母座 14P PIN腳長2.10外殼腳寬1.8

SBC-140P2A-20x-S412

SBC-140P2A-20x-S412

SIZE

A4

VER

R1

ITEM NO.

DESCRIPTION

DRAWN

DATE

Jack

07/20/23

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE