
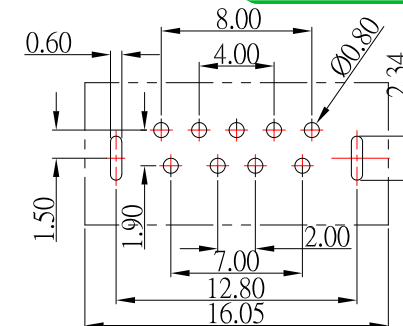

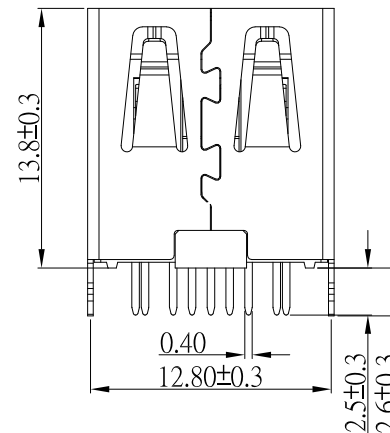
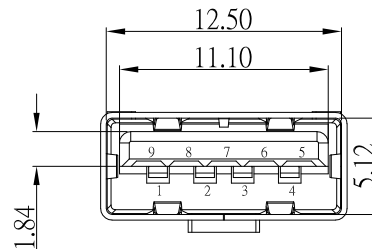
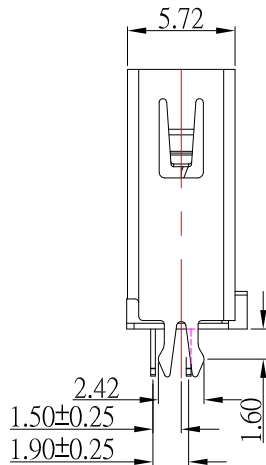


SUA-110V13-32x-S410

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

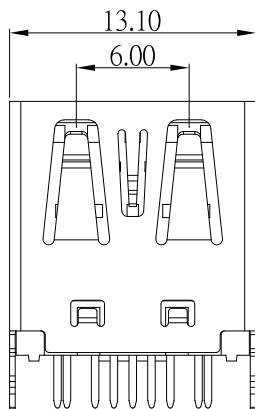

PCB LAYOUT

NOTE:

1.MATERIAL:

1.1 Housing: LCP,Blue

1.2 Contact: 4-PIN:Phosphor Bronze
5-PIN:Brass

1.3 Shell: SUS

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

2.2 Shell: Nickel under Plated surface layer

3.SPECIFICATION:

3.1 Rate: 1.5 A

3.2 Insulator Resistance:100MΩ Min

3.3 Dielectric Strength: 100V AC

3.4 Contact Resistance: 30mΩ Max

3.5 Durability: 5000 cycles

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 09/02/25
CHECKED BY: Jacky Chen
DATE: 09/02/25
APPROVED BY: Tony Kao
DATE: 09/02/25

MAT'L	TITLE	CONNECTION
FINISH	MODLE	USB 3.1 GEN 2 10G AF 180度無捲邊魚叉腳 H13.8 DIP
SCALE	DWG NO.	SUA-110V13-32x-S410
SHEET NO.	PART NO.	SUA-110V13-32x-S410

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------