


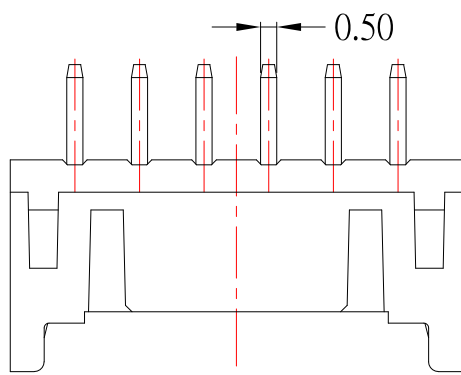


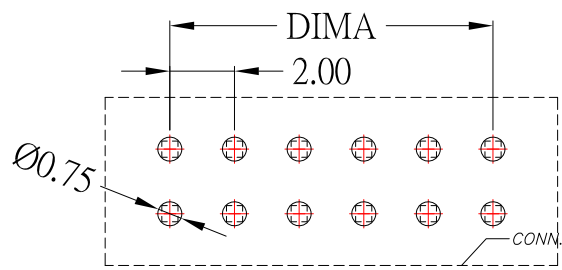

PIN NO.	Dimensions	
	A	B
04	2.00	6.00
06	4.00	8.00
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

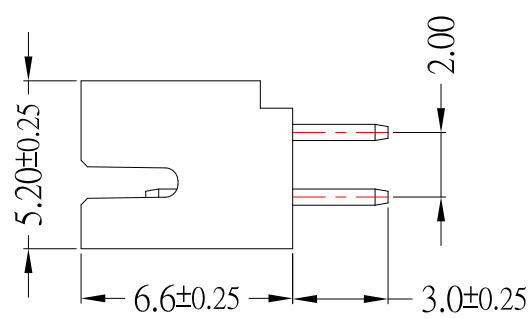

P.C.B LAYOUT

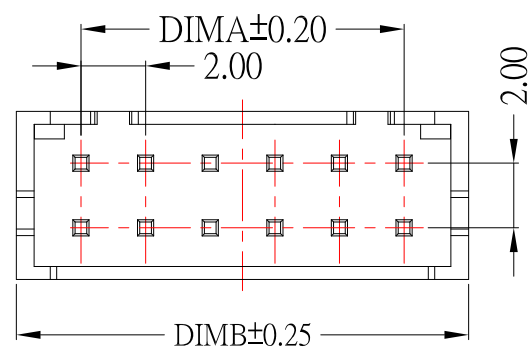

SPECIFICATIONS

- 1.Current rating : 3.0A AC , DC
- 2.Voltage rating : 250V AC , DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000MΩ min.
- 5.Withstand voltage : 800V AC/minute
- 6.Contact resistance : 20mΩ/Max

MATERIAL:

- 1.Housing : PA66
- 2.Contact : Brass , Tin plated over Nickel

				建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3 3RD. ANGEL'S UNITS MM				DRAWN BY: Jack Lu		DATE: 11/06/25		MAT'L		TITLE: CONNECTOR	
CHECKED BY: Jacky Chen		DATE: 11/06/25						FINISH		MODLE: WAFER 2.0 DIP 180度 雙排					
APPROVED BY: Tony Kao		DATE: 11/06/25								SCALE: 1 : 1		DWG NO.: WF-2005CVD2Nxx-S304		SIZE: A4	
								SHEET NO.: 1 of 1				PART NO.: WF-2005CVD2Nxx-S304		VER: R	
ITEM NO.	DESCRIPTION	DRAWN	DATE												