



BC-90xx0-6P-S505

PART NO.	DIM A	DIM B
24	2.4	4.35±0.25
35	3.5	5.45±0.25

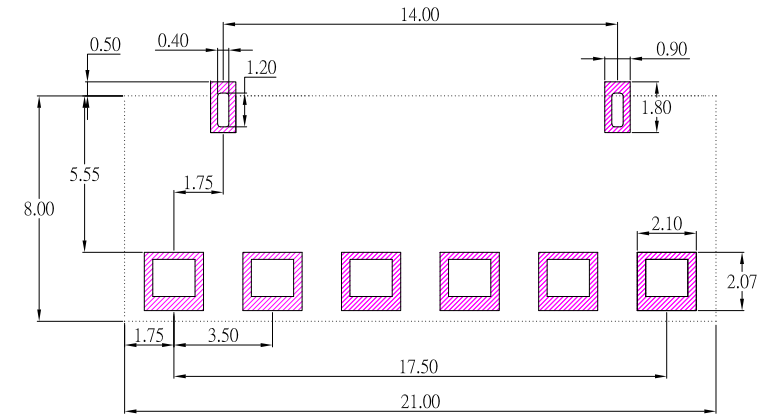

P.C.B LAYOUT TOP VIEW

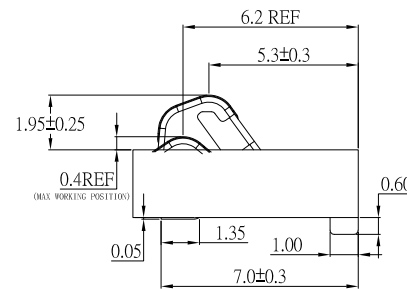

MATERIAL:

1. INSULATOR : LCP
 2. CONTACT : PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL
- SPECIFICATION:

1. RATING : 24.0 , 3.0A
2. CONTACT RESISTANCE : 30mΩ
3. INSULATION RESISTANCE : 500MΩ Min
4. DIELECTRIC VOLTAGE : 500V
5. OPERATING TEMPERATURE : -40° C ~ 85° C

				DRAWN BY: Jack Lu				DATE: 08/06/26				MAT'L		TITLE		CONNECTOR	
				CHECKED BY: Jacky Chen				DATE: 08/06/26				FINISH		MODLE		BATTERY CONNECTOR	
				APPROVED BY: Tony Kao				DATE: 08/06/26				SCALE		DWG NO.		BC-90xx0-6P-S505	
												SHEET NO.		1 of 1		PART NO.	
																BC-90xx0-6P-S505	
																VER	
																R	

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2

Above 5 ~ 15 ±0.3

Above 15 ~ 30 ±0.4

Above 30 ~ 50 ±0.5

Angle ±0.3

3RD. ANGEL'S

UNITS

MM