



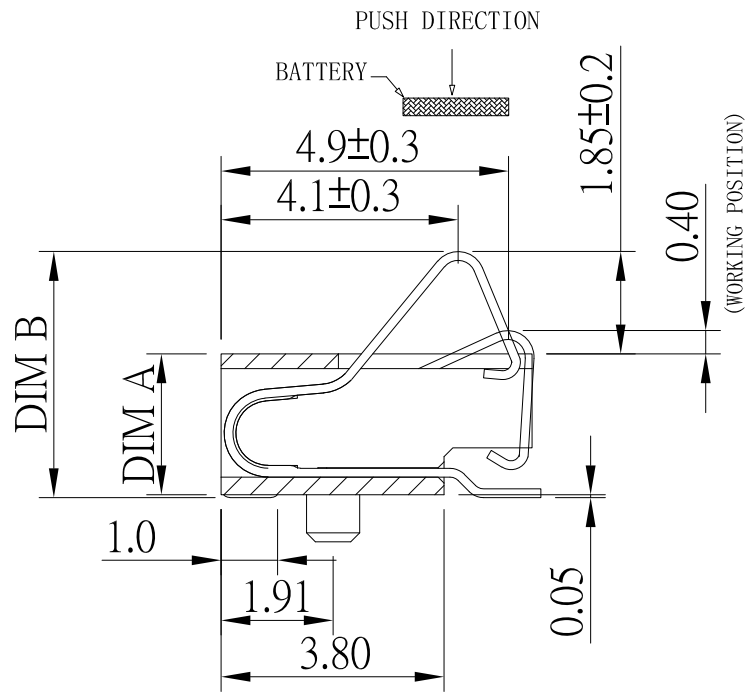


BC-35xx0E-2P-S505

PART NO.	DIM A	DIM B
24	2.4	4.30±0.2
30	3.0	4.90±0.2
35	3.5	5.40±0.2

此固定片仅用于固定产品，
请勿连接电路。

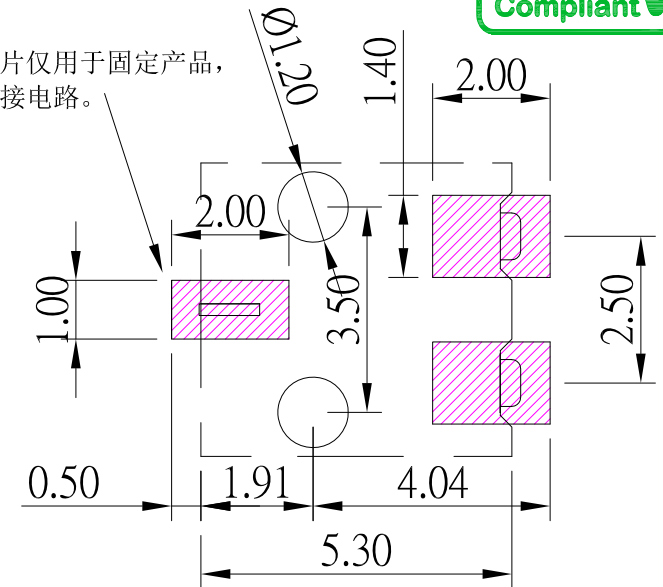

P.C.B LAYOUT
TOP VIEW

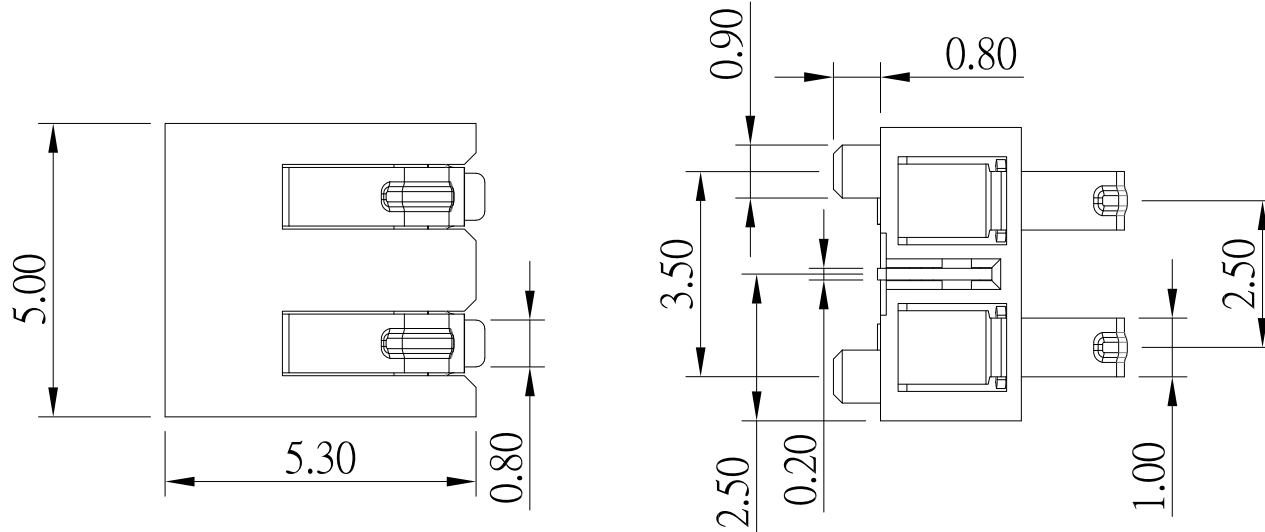

MATERIAL:

1. INSULATOR : LCP
 2. CONTACT : PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL
- SPECIFICATION:

1. RATING : 12.0 , 2.0A
2. CONTACT RESISTANCE : 30mΩ
3. INSULATION RESISTANCE : 500MΩ Min
4. DIELECTRIC VOLTAGE : 500V
5. OPERATING TEMPERATURE : -40° C ~ 85° C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2	3RD. ANGEL'S	UNITS	MM
Above 5 ~ 15	±0.3			
Above 15 ~ 30	±0.4			
Above 30 ~ 50	±0.5			

Angle ±0.3

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	08/06/26	FINISH		MODLE	BATTERY CONNECTOR 帶定位柱
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	BC-35xx0E-2P-S505
Jacky Chen	08/06/26	SHEET NO.	1 of 1	PART NO.	BC-35xx0E-2P-S505
APPROVED BY:	DATE				
Tony Kao	08/06/26				

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------