

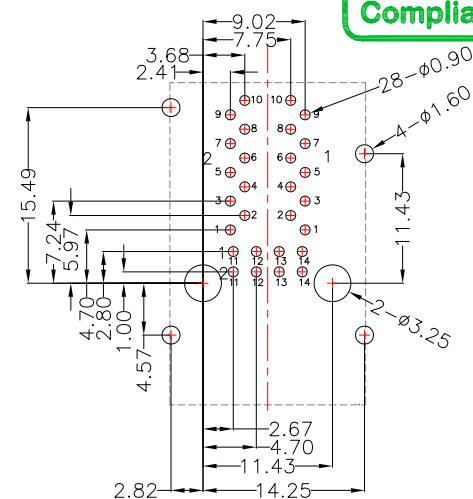


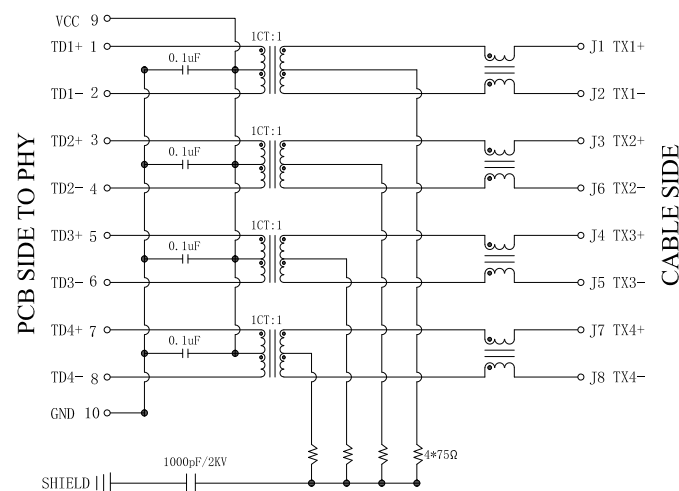


PCB LAYOUT

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565nm	20mA	2.2-2.4V
Yellow	590nm	20mA	2.1-2.5V



SCHEMATIC

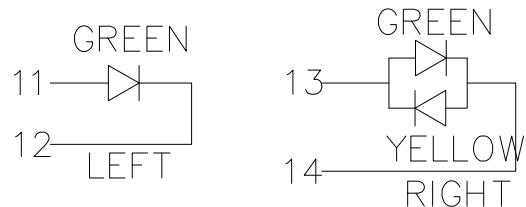

Material:

- 1.Housing : PA66,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated
- 4.Terminal Bracket : PBT,Black

Environmental:

- 1.Operation Temperature : -40℃ ~ +85℃
2.Storage Temperature : -40℃ ~ +85℃

				建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Above 50 ~ 100 ± 0.6 Angle 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY:	DATE	MAT'L		TITLE	RJ45	
					Jack Lu	02/11/25	FINISH		MODLE	RJ45 2X1 1000BASE WITH LED	
					CHECKED BY:	DATE					
					Jacky Chen	02/11/25	SCALE	1 : 1	DWG NO.	MJ45-21Q04D-GGY-S473	SIZE A4
					APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	MJ45-21Q04D-GGY-S473	VER
ITEM NO.	DESCRIPTION	DRAWN	DATE	Tony Kao	02/11/25	R					